

# PVC CABLE TRAYS


## Specification Sheets

# Basorplast


# Specification Sheet

## Basorplast BPE H-2 3/8"


**3E Basor**  
CABLE TRAY SPECIALIST

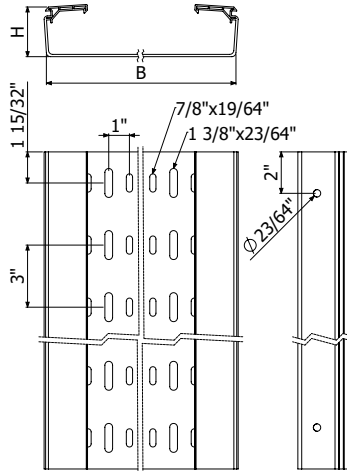

- \* 2.3/8" tray depth
- \* 4" - 12" tray width
- \* 10 Ft tray large
- \* Perforated model
- \* PVC M1 UV material
- \* Ultra-violet resistant plastic
- \* Insulating



| MODELS             | B    |     | H      |    | Weight<br>LBS/ | PVC M1 UV<br>REF. PVC |
|--------------------|------|-----|--------|----|----------------|-----------------------|
|                    | inch | mm  | inch   | mm |                |                       |
| BPE-P 2.3/8" x 4"  | 4"   | 100 | 2 3/8" | 60 | 4.83           | 2/10070               |
| BPE-P 2.3/8" x 6"  | 6"   | 150 | 2 3/8" | 60 | 6.02           | 2/10071               |
| BPE-P 2.3/8" x 8"  | 8"   | 200 | 2 3/8" | 60 | 9.59           | 2/10072               |
| BPE-P 2.3/8" x 12" | 12"  | 300 | 2 3/8" | 60 | 15.48          | 2/10073               |

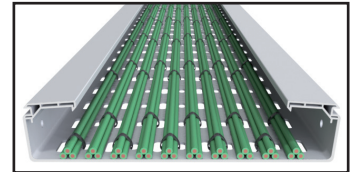

2 JUBPE 60 (2/10084)

### USEFUL AREA (inch<sup>2</sup>)

| B   |     | H60 (2 3/8")    |                 |
|-----|-----|-----------------|-----------------|
| in  | mm  | in <sup>2</sup> | cm <sup>2</sup> |
| 4"  | 100 | 8.06            | 52              |
| 6"  | 150 | 12.4            | 80              |
| 8"  | 200 | 15.7            | 101             |
| 12" | 300 | 23.6            | 152             |

### NEMA Cable Tray Classification (U.S) - UL 568 SWL lb/ft



| VALUES             |      | Temp. Max 104°F |          | Temp. Max 140°F |          |
|--------------------|------|-----------------|----------|-----------------|----------|
|                    |      | 6ft span        | 8ft span | 6ft span        | 8ft span |
| MODELS             | Nema | lb/ft           | lb/ft    | lb/ft           | lb/ft    |
| BPE-P 2.3/8" x 4"  | -    | 3,7             | 2,1      | 2,4             | 1,3      |
| BPE-P 2.3/8" x 6"  | -    | 5,1             | 2,8      | 3,2             | 1,8      |
| BPE-P 2.3/8" x 8"  | -    | 23,1            | 13,0     | 15,0            | 8,4      |
| BPE-P 2.3/8" x 12" | 5AA  | 25,4            | 14,2     | 16,5            | 9,3      |

NOTE: Tests acc. UL 568 Method A (Load Before Destruction), 1.5 Safety factor


# Specification Sheet

## Basorplast BPE-C H-2 3/8"

**3E Basor**  
CABLE TRAY SPECIALIST




- \* 2.3/8" tray depth
- \* 4" - 12" tray width
- \* 10 Ft tray large
- \* Non perforated model
- \* PVC M1 UV material
- \* Ultra-violet resistant plastic
- \* Insulating



**RoHS**  
OK

| MODELS             | B    |     | H      |    | Weight<br>LBS/ | PVC M1 UV<br>REF. PVC |
|--------------------|------|-----|--------|----|----------------|-----------------------|
|                    | inch | mm  | inch   | mm |                |                       |
| BPE-C 2.3/8" x 4"  | 4"   | 100 | 2 3/8" | 60 | 5.09           | 2/10062               |
| BPE-C 2.3/8" x 6"  | 6"   | 150 | 2 3/8" | 60 | 6.81           | 2/10063               |
| BPE-C 2.3/8" x 8"  | 8"   | 200 | 2 3/8" | 60 | 10.19          | 2/10064               |
| BPE-C 2.3/8" x 12" | 12"  | 300 | 2 3/8" | 60 | 16.40          | 2/10065               |



2 JUBPE 60 (2/10084)

USEFUL AREA (inch<sup>2</sup>)

| B   |     | H60 (2 3/8")    |                 |
|-----|-----|-----------------|-----------------|
| in  | mm  | in <sup>2</sup> | cm <sup>2</sup> |
| 4"  | 100 | 8.06            | 52              |
| 6"  | 150 | 12.4            | 80              |
| 8"  | 200 | 15.7            | 101             |
| 12" | 300 | 23.6            | 152             |

NEMA Cable Tray Classification (U.S) - UL 568 SWL lb/ft


| VALUES             |      | Temp. Max 104°F |          | Temp. Max 140°F |          |
|--------------------|------|-----------------|----------|-----------------|----------|
|                    |      | 6ft span        | 8ft span | 6ft span        | 8ft span |
| MODELS             | Nema | lb/ft           | lb/ft    | lb/ft           | lb/ft    |
| BPE-C 2.3/8" x 4"  | -    | 3,7             | 2,1      | 2,4             | 1,3      |
| BPE-C 2.3/8" x 6"  | -    | 5,1             | 2,8      | 3,2             | 1,8      |
| BPE-C 2.3/8" x 8"  | -    | 23,1            | 13,0     | 15,0            | 8,4      |
| BPE-C 2.3/8" x 12" | 5AA  | 25,4            | 14,2     | 16,5            | 9,3      |

NOTE: Tests acc. UL 568 Method A (Load Before Destruction), 1.5 Safety factor


# Specification Sheet

## Basorplast BPE-P H-4"


**3E Basor**  
CABLE TRAY SPECIALIST

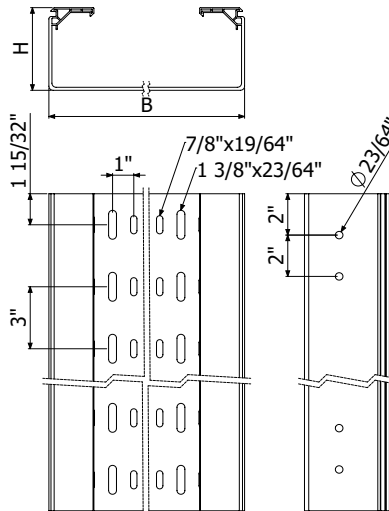

- \* 4" tray depth
- \* 8" - 24" tray width
- \* 10 Ft tray large
- \* Perforated model
- \* PVC-M1 UV material
- \* Ultra-violet resistant plastic
- \* Insulating



| MODELS         | B    |     | H    |     | Weight<br>LBS/EA | PVC-M1 UV<br>REF. PVC |
|----------------|------|-----|------|-----|------------------|-----------------------|
|                | inch | mm  | inch | mm  |                  |                       |
| BPE-C 4" x 8"  | 8"   | 200 | 4"   | 100 | 14.48            | 2/10074               |
| BPE-C 4" x 12" | 12"  | 300 | 4"   | 100 | 21.43            | 2/10075               |
| BPE-C 4" x 16" | 16"  | 400 | 4"   | 100 | 27.78            | 2/10076               |
| BPE-C 4" x 24" | 24"  | 600 | 4"   | 100 | 42.46            | 2/10077               |

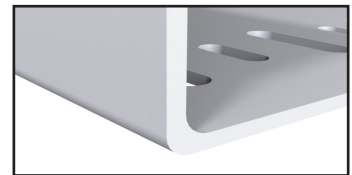

2 JUBPE 100 (2/10085)

USEFUL AREA (inch<sup>2</sup>)

| B   |     | H100 (4")       |                 |
|-----|-----|-----------------|-----------------|
| in  | mm  | in <sup>2</sup> | cm <sup>2</sup> |
| 8"  | 200 | 27.1            | 175             |
| 12" | 300 | 40.8            | 263             |
| 16  | 400 | 54.8            | 354             |
| 24" | 600 | 83.5            | 539             |

NEMA Cable Tray Classification (U.S) - UL 568 SWL lb/ft

| VALUES         |      | Temp. Max 104°F |          | Nema | Temp. Max 140°F |          |
|----------------|------|-----------------|----------|------|-----------------|----------|
|                |      | 6ft span        | 8ft span |      | 6ft span        | 8ft span |
| MODELS         | Nema | lb/ft           | lb/ft    |      | lb/ft           | lb/ft    |
| BPE-C 4" x 8"  | 5A   | 39,6            | 22,3     | 5AA  | 25,8            | 14,5     |
| BPE-C 4" x 12" | 8AA  | 62,6            | 35,2     | 5A   | 40,8            | 22,9     |
| BPE-C 4" x 16" | 8A   | 97,2            | 54,6     | 8AA  | 63,3            | 35,6     |
| BPE-C 4" x 24" | 8B   | 145,4           | 81,8     | 8A   | 94,7            | 53,3     |


NOTE: Tests acc. UL 568 Method A (Load Before Destruction), 1,5 Safety factor




# Specification Sheet

## Basorplast BPE-C H-4"


**3E Basor**  
CABLE TRAY SPECIALIST

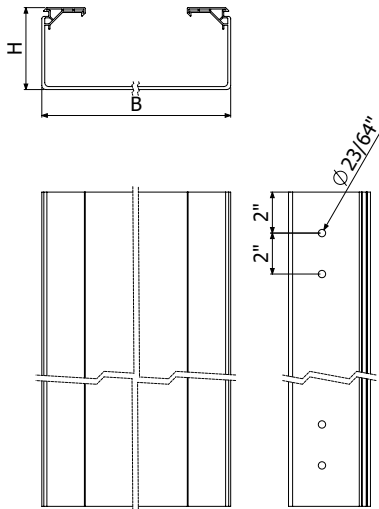

- \* 4" tray depth
- \* 8" - 24" tray width
- \* 10 Ft tray large
- \* Non Perforated model
- \* PVC-M1 UV material
- \* Ultra-violet resistant plastic
- \* Insulating



| MODELS         | B    |     | H    |     | Weight<br>LBS/EA | PVC-M1 UV<br>REF. PVC |
|----------------|------|-----|------|-----|------------------|-----------------------|
|                | inch | mm  | inch | mm  |                  |                       |
| BPE-P 4" x 8"  | 8"   | 200 | 4"   | 100 | 15.74            | 2/10066               |
| BPE-P 4" x 12" | 12"  | 300 | 4"   | 100 | 22.82            | 2/10067               |
| BPE-P 4" x 16" | 16"  | 400 | 4"   | 100 | 30.03            | 2/10068               |
| BPE-P 4" x 24" | 24"  | 600 | 4"   | 100 | 44.45            | 2/10069               |

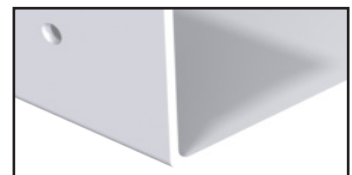

2 JUBPE 100 (2/10085)

USEFUL AREA (inch<sup>2</sup>)

| B   |     | H100 (4")       |                 |
|-----|-----|-----------------|-----------------|
| in  | mm  | in <sup>2</sup> | cm <sup>2</sup> |
| 8"  | 200 | 27.1            | 175             |
| 12" | 300 | 40.8            | 263             |
| 16  | 400 | 54.8            | 354             |
| 24" | 600 | 83.5            | 539             |

NEMA Cable Tray Classification (U.S) - UL 568 SWL lb/ft


| VALUES         |      | Temp. Max 104°F |          | Nema | Temp. Max 140°F |          |
|----------------|------|-----------------|----------|------|-----------------|----------|
|                |      | 6ft span        | 8ft span |      | 6ft span        | 8ft span |
| MODELS         | Nema | lb/ft           | lb/ft    |      | lb/ft           | lb/ft    |
| BPE-C 4" x 8"  | 5A   | 39,6            | 22,3     | 5AA  | 25,8            | 14,5     |
| BPE-C 4" x 12" | 8AA  | 62,6            | 35,2     | 5A   | 40,8            | 22,9     |
| BPE-C 4" x 16" | 8A   | 97,2            | 54,6     | 8AA  | 63,3            | 35,6     |
| BPE-C 4" x 24" | 8B   | 145,4           | 81,8     | 8A   | 94,7            | 53,3     |

NOTE: Tests acc. UL 568 Method A (Load Before Destruction), 1,5 Safety factor


# Specification Sheet

## Basorplast TBPE

**3E Basor**  
CABLE TRAY SPECIALIST

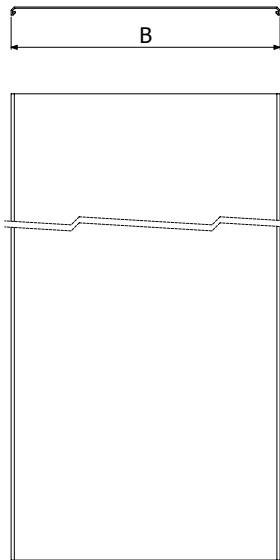

- \* Cover for PVC tray
- \* 4" - 24" cover tray width
- \* 10 Ft cover tray large
- \* Non Perforated model
- \* PVC M1 UV material
- \* Ultra-violet resistant plastic
- \* Insulating



| Models   | B    |     | Weight<br>LBS/EA | PVC M1 UV<br>REF. PVC |
|----------|------|-----|------------------|-----------------------|
|          | inch | mm  |                  |                       |
| TBPE 4"  | 4"   | 100 | 2.45             | 2/10078               |
| TBPE 6"  | 6"   | 150 | 3.31             | 2/10079               |
| TBPE 8"  | 8"   | 200 | 5.09             | 2/10080               |
| TBPE 12" | 12"  | 300 | 7.28             | 2/10081               |
| TBPE 16" | 16"  | 400 | 10.12            | 2/10082               |
| TBPE 24" | 24"  | 600 | 13.89            | 2/10083               |



No extra fitting needed




# Specification Sheet

## Basorplast JUBPE + B2-P

**3E Basor**  
CABLE TRAY SPECIALIST

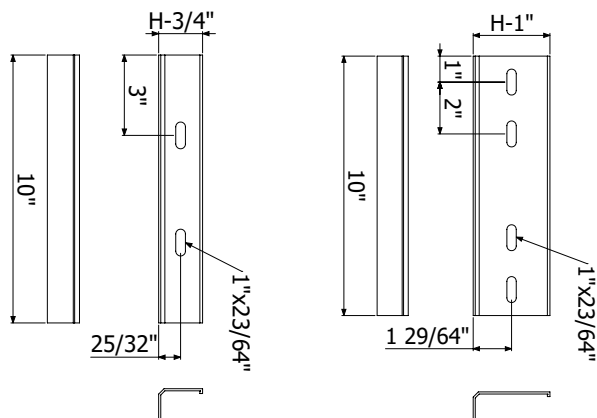

- \* Union joints for PVC tray
- \* Screws and nuts for union joints
- \* 3/4"- 1" high
- \* 10" union joint large
- \* For Perforated/Non perforated model
- \* PVC/M1 UV material
- \* Ultra-violet resistant plastic
- \* Insulating




**RoHS**  
OK

| Model union joint | H    |     | Weight<br>LBS/EA | PVC/M1 UV<br>REF. PVC |
|-------------------|------|-----|------------------|-----------------------|
|                   | inch | mm  |                  |                       |
| JUBPE H3/4"       | 3/4" | 60  | 0.11             | 2/10084               |
| JUBPE H1"         | 1"   | 100 | 0.20             | 2/10085               |

2 JUBPE 60 (2/10084) + 4/100 B2-P (2/10017)  
2 JUBPE 100 (2/10085) + 8/100 B2-P (2/10017)


| Model screw and nut | Weight<br>LBS/EA | PVC/M1 UV<br>REF. PVC |
|---------------------|------------------|-----------------------|
|                     |                  |                       |
| B2-P                | 0.88             | 2/10017               |

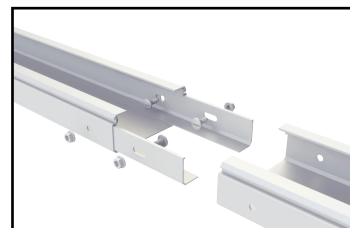


# Specification Sheet

## Basorplast CPBPE + TCPBPE

**3E Basor**  
CABLE TRAY SPECIALIST

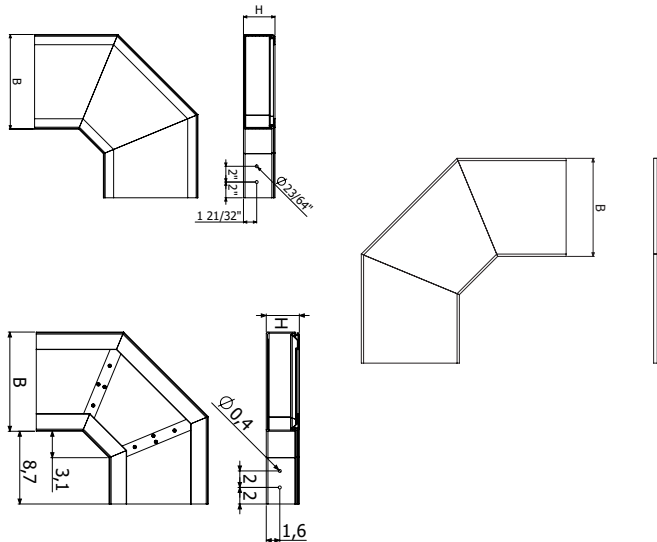

- \* Flat bend for PVC tray
- \* Cover for flat bend
- \* 2.3/8" and 4" high
- \* Non perforated model
- \* PVC M1 UV material
- \* Ultra-violet resistant plastic
- \* Insulating

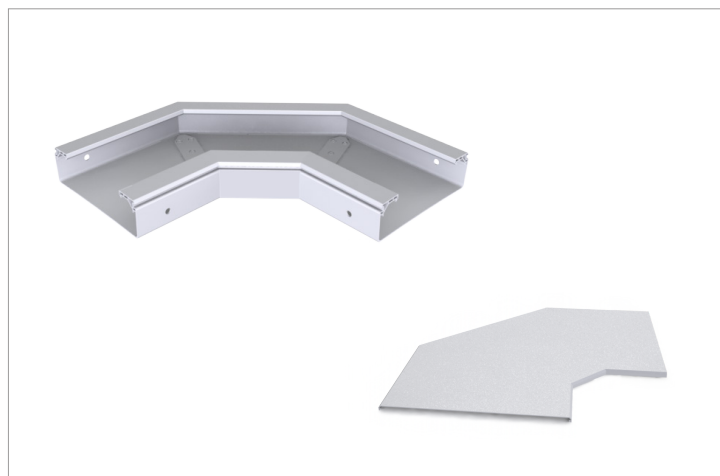

UNE-EN 61537  
UNE-EN 50085



UNE-23727  
UNE-EN 61537  
UNE-EN 50085



UNE-EN 60695



MOD 60x100 10J  
UNE-EN 61537  
UNE-EN 50085



UNE-EN 61537  
UNE-EN 50085



OK




ISO/TR 10358  
DIN 8061



RoHS  
OK

| Model flat bend    | B    |     | H      |     | Weight | PVC M1 UV |
|--------------------|------|-----|--------|-----|--------|-----------|
|                    | inch | mm  | inch   | mm  | LBS/EA | REF. PVC  |
| CPBPE 2.3/8" x 4"  | 4"   | 100 | 2 3/8" | 60  | 0.88   | 2/10089   |
| CPBPE 2.3/8" x 6"  | 6"   | 150 | 2 3/8" | 60  | 1.19   | 2/10090   |
| CPBPE 2.3/8" x 8"  | 8"   | 200 | 2 3/8" | 60  | 2.01   | 2/10091   |
| CPBPE 2.3/8" x 12" | 12"  | 300 | 2 3/8" | 60  | 3.55   | 2/10092   |
| CPBPE 4" x 8"      | 8"   | 200 | 4"     | 100 | 2.73   | 2/10093   |
| CPBPE 4" x 12"     | 12"  | 300 | 4"     | 100 | 4.72   | 2/10094   |
| CPBPE 4" x 16"     | 16"  | 400 | 4"     | 100 | 7.21   | 2/10095   |
| CPBPE 4" x 24"     | 24"  | 600 | 4"     | 100 | 8.99   | 2/10096   |

| Model cover flat bend | B    |     | Weight | PVC M1 UV |
|-----------------------|------|-----|--------|-----------|
|                       | inch | mm  | LBS/EA | REF. PVC  |
| TCPBPE 4"             | 4"   | 100 | 0.40   | 2/10097   |
| TCPBPE 6"             | 6"   | 150 | 0.57   | 2/10098   |
| TCPBPE 8"             | 8"   | 200 | 0.95   | 2/10099   |
| TCPBPE 12"            | 12"  | 300 | 1.57   | 2/10100   |
| TCPBPE 16"            | 16"  | 400 | 2.47   | 2/10101   |
| TCPBPE 24"            | 24"  | 600 | 4.28   | 2/10102   |

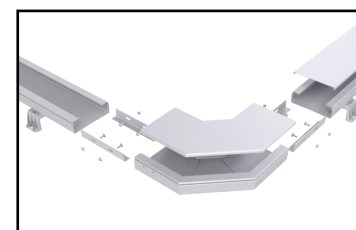


2 JUBPE 60 (2/10084) + 4/100 B2-P (2/10017)  
2 JUBPE 100 (2/10085) + 8/100 B2-P (2/10017)



# Specification Sheet

## Basorplast CXBPE + TCXBPE

**3E Basor**  
CABLE TRAY SPECIALIST

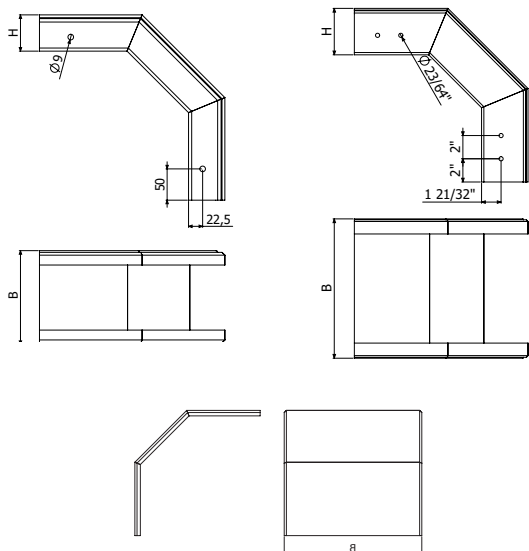

- \* Outside bend for PVC tray
- \* Cover for outside bend
- \* 2.3/8" and 4" high
- \* Non perforated model
- \* PVC M1 UV material
- \* Ultra-violet resistant plastic
- \* Insulating



UNE-EN 61537  
UNE-EN 50085



UNE-23727  
UNE-EN 61537  
UNE-EN 50085



UNE-EN 60695



MOD 60x100 10J  
UNE-EN 61537  
UNE-EN 50085



UNE-EN 61537  
UNE-EN 50085




ISO/TR 10358  
DIN 8061

**RoHS**  
OK

| Model outside bend | B    |     | H      |     | Weight | PVC M1 UV |
|--------------------|------|-----|--------|-----|--------|-----------|
|                    | inch | mm  | inch   | mm  | LBS/EA | REF. PVC  |
| CXBPE 2.3/8" x 4"  | 4"   | 100 | 2 3/8" | 60  | 0.86   | 2/10119   |
| CXBPE 2.3/8" x 6"  | 6"   | 150 | 2 3/8" | 60  | 1.08   | 2/10120   |
| CXBPE 2.3/8" x 8"  | 8"   | 200 | 2 3/8" | 60  | 1.72   | 2/10121   |
| CXBPE 2.3/8" x 12" | 12"  | 300 | 2 3/8" | 60  | 2.62   | 2/10122   |
| CXBPE 4" x 8"      | 8"   | 200 | 4"     | 100 | 3.02   | 2/10123   |
| CXBPE 4" x 12"     | 12"  | 300 | 4"     | 100 | 4.37   | 2/10124   |
| CXBPE 4" x 16"     | 16"  | 400 | 4"     | 100 | 5.62   | 2/10125   |
| CXBPE 4" x 24"     | 24"  | 600 | 4"     | 100 | 7.12   | 2/10126   |

| Model Cover         | B    |     | H      |     | Weight | PVC M1 UV |
|---------------------|------|-----|--------|-----|--------|-----------|
|                     | inch | mm  | inch   | mm  | LBS/EA | REF. PVC  |
| TCXBPE 2.3/8" x 4"  | 4"   | 100 | 2 3/8" | 60  | 0.49   | 2/10127   |
| TCXBPE 2.3/8" x 6"  | 6"   | 150 | 2 3/8" | 60  | 0.66   | 2/10128   |
| TCXBPE 2.3/8" x 8"  | 8"   | 200 | 2 3/8" | 60  | 1.08   | 2/10129   |
| TCXBPE 2.3/8" x 12" | 12"  | 300 | 2 3/8" | 60  | 1.43   | 2/10130   |
| TCXBPE 4" x 8"      | 8"   | 200 | 4"     | 100 | 1.65   | 2/10131   |
| TCXBPE 4" x 12"     | 12"  | 300 | 4"     | 100 | 1.81   | 2/10132   |
| TCXBPE 4" x 16"     | 16"  | 400 | 4"     | 100 | 2.58   | 2/10133   |
| TCXBPE 4" x 24"     | 24"  | 600 | 4"     | 100 | 3.06   | 2/10134   |

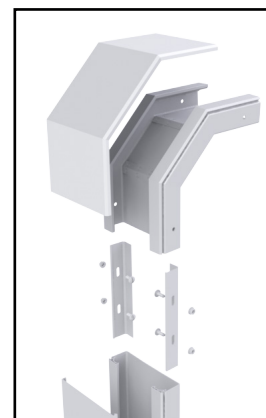


2 JUBPE 60 (2/10084) + 4/100 B2-P (2/10017)  
2 JUBPE 100 (2/10085) + 8/100 B2-P (2/10017)

# Specification Sheet

## Basorplast CCBPE + TCCBPE

**3E Basor**  
CABLE TRAY SPECIALIST

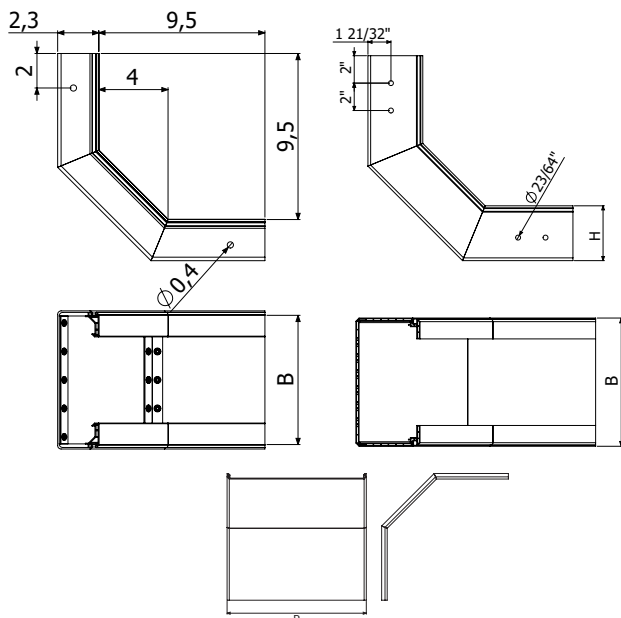

- \* Inside bend for PVC tray
- \* Cover for inside bend
- \* 2.3/8" and 4" high
- \* Non perforated model
- \* PVC-M1 UV material
- \* Ultra-violet resistant plastic
- \* Insulating



UNE-EN 61537  
UNE-EN 50085



UNE-23727  
UNE-EN 61537  
UNE-EN 50085



UNE-EN 60695



MOD 60x100 10J  
UNE-EN 61537  
UNE-EN 50085



UNE-EN 61537  
UNE-EN 50085




ISO/TR 10358  
DIN 8061

**RoHS**  
OK

| Model Inside bend  | B    |     | H      |     | Weight | PVC-M1 UV |
|--------------------|------|-----|--------|-----|--------|-----------|
|                    | inch | mm  | inch   | mm  | LBS/EA | REF. PVC  |
| CCBPE 2.3/8" x 4"  | 4"   | 100 | 2 3/8" | 60  | 0.86   | 2/10103   |
| CCBPE 2.3/8" x 6"  | 6"   | 150 | 2 3/8" | 60  | 1.08   | 2/10104   |
| CCBPE 2.3/8" x 8"  | 8"   | 200 | 2 3/8" | 60  | 1.72   | 2/10105   |
| CCBPE 2.3/8" x 12" | 12"  | 300 | 2 3/8" | 60  | 2.62   | 2/10106   |
| CCBPE 4" x 8"      | 8"   | 200 | 4"     | 100 | 3.02   | 2/10107   |
| CCBPE 4" x 12"     | 12"  | 300 | 4"     | 100 | 4.37   | 2/10108   |
| CCBPE 4" x 16"     | 16"  | 400 | 4"     | 100 | 5.62   | 2/10109   |
| CCBPE 4" x 24"     | 24"  | 600 | 4"     | 100 | 7.12   | 2/10110   |

| Model Cover         | B    |     | H      |     | Weight | PVC-M1 UV |
|---------------------|------|-----|--------|-----|--------|-----------|
|                     | inch | mm  | inch   | mm  | LBS/EA | REF. PVC  |
| TCCBPE 2.3/8" x 4"  | 4"   | 100 | 2 3/8" | 60  | 0.40   | 2/10111   |
| TCCBPE 2.3/8" x 6"  | 6"   | 150 | 2 3/8" | 60  | 0.53   | 2/10112   |
| TCCBPE 2.3/8" x 8"  | 8"   | 200 | 2 3/8" | 60  | 0.82   | 2/10113   |
| TCCBPE 2.3/8" x 12" | 12"  | 300 | 2 3/8" | 60  | 1.15   | 2/10114   |
| TCCBPE 4" x 8"      | 8"   | 200 | 4"     | 100 | 1.23   | 2/10115   |
| TCCBPE 4" x 12"     | 12"  | 300 | 4"     | 100 | 1.34   | 2/10116   |
| TCCBPE 4" x 16"     | 16"  | 400 | 4"     | 100 | 1.92   | 2/10117   |
| TCCBPE 4" x 24"     | 24"  | 600 | 4"     | 100 | 2.29   | 2/10118   |

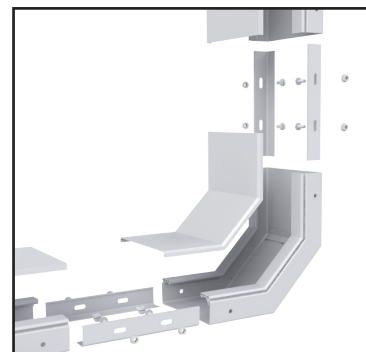


2 JUBPE 60 (2/10084) + 4/100 B2-P (2/10017)  
2 JUBPE 100 (2/10085) + 8/100 B2-P (2/10017)

# Specification Sheet

**Basorplast  
PDBPE**

**3E Basor**  
CABLE TRAY SPECIALIST

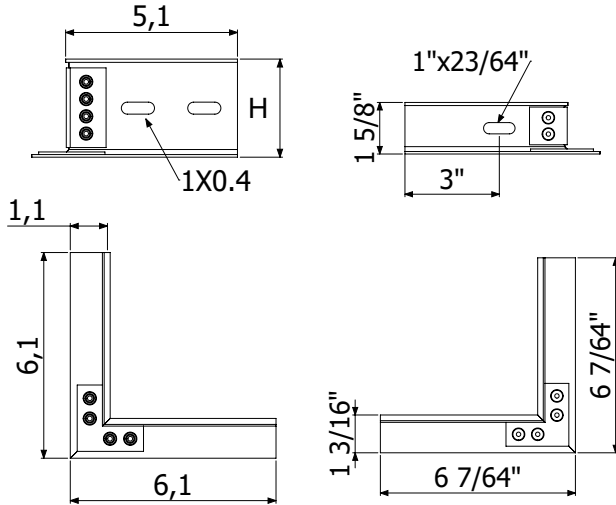

- \* Derivation piece for PVC tray
- \* 2.3/8" and 4" high
- \* For cross and t bend accessories
- \* PVC M1 UV material
- \* Ultra-violet resistant plastic
- \* Insulating



UNE-EN 61537  
UNE-EN 50085



UNE-23727  
UNE-EN 61537  
UNE-EN 50085



UNE-EN 60695



MOD 60x100 10J  
UNE-EN 61537  
UNE-EN 50085



UNE-EN 61537  
UNE-EN 50085








ISO/TR 10358  
DIN 8061



RoHS  
OK

| Model Inside bend | B       |    | H      |     | Weight<br>LBS/EA | PVC M1 UV<br>REF. PVC |
|-------------------|---------|----|--------|-----|------------------|-----------------------|
|                   | inch    | mm | inch   | mm  |                  |                       |
| PDBPE 2.3/8"      | 1.3/16" | 30 | 2.3/8" | 60  | 0.13             | 223021                |
| PDBPE 4"          | 1.3/16" | 30 | 4"     | 100 | 0.18             | 223022                |

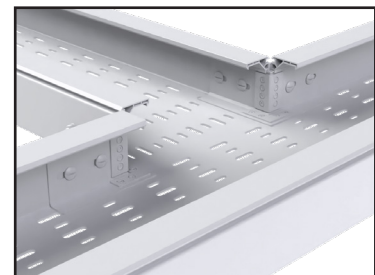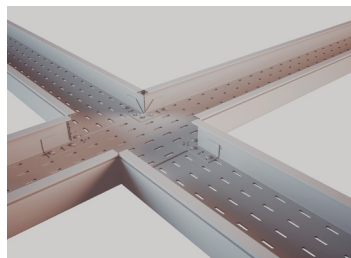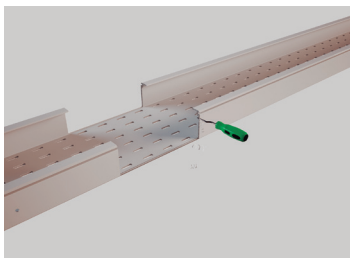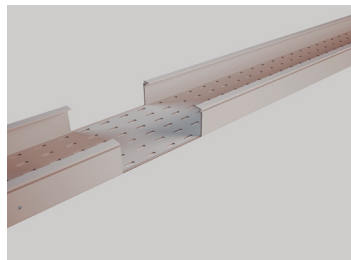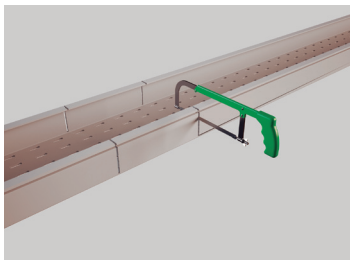

1 PDBPE + 2/100 B2-P (2/10017)



# Specification Sheet

## Basorplast TFBPE

**3E Basor**  
CABLE TRAY SPECIALIST



- \* End cover for PVC tray
- \* 2.3/8" and 4" high
- \* Non perforated model
- \* PVC M1 UV material
- \* Ultra-violet resistant plastic
- \* Insulating

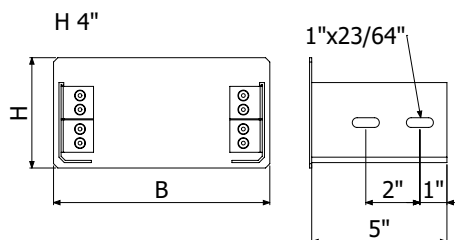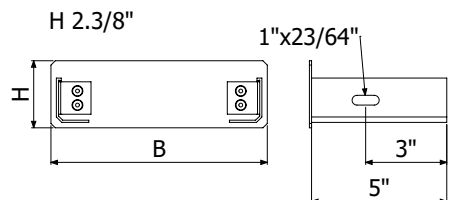

UNE-EN 61537  
UNE-EN 50085



UNE-23727  
UNE-EN 61537  
UNE-EN 50085



UNE-EN 60695



MOD 60x100 10J  
UNE-EN 61537  
UNE-EN 50085



UNE-EN 61537  
UNE-EN 50085




OK



ISO/TR 10358  
DIN 8061

**RoHS**  
OK

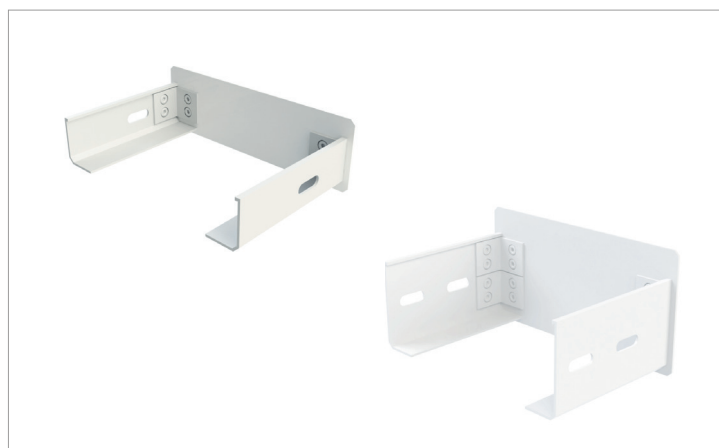

| Model End cover    | B    |     | H      |     | Weight | PVC M1 UV |
|--------------------|------|-----|--------|-----|--------|-----------|
|                    | inch | mm  | inch   | mm  | LBS/EA | REF. PVC  |
| TFBPE 2.3/8" x 4"  | 4"   | 100 | 2 3/8" | 60  | 0.20   | 223023    |
| TFBPE 2.3/8" x 6"  | 6"   | 150 | 2 3/8" | 60  | 0.22   | 223024    |
| TFBPE 2.3/8" x 8"  | 8"   | 200 | 2 3/8" | 60  | 0.33   | 223025    |
| TFBPE 2.3/8" x 12" | 12"  | 300 | 2 3/8" | 60  | 0.46   | 223026    |
| TFBPE 4" x 8"      | 8"   | 200 | 4"     | 100 | 0.37   | 223027    |
| TFBPE 4" x 12"     | 12"  | 300 | 4"     | 100 | 0.45   | 223028    |
| TFBPE 4" x 16"     | 16"  | 400 | 4"     | 100 | 0.50   | 223029    |
| TFBPE 4" x 24"     | 24"  | 600 | 4"     | 100 | 0.65   | 223030    |



1 TFBPE + 4/100 B2-P (2/10017)




# Specification Sheet

## Basorplast JUBPE-AB KIT




**3E Basor**  
CABLE TRAY SPECIALIST



- \* Articulated joint for PVC tray
- \* 2.3/8" and 4" high
- \* Articulated and hinge function
- \* PVC M1 UV material
- \* Ultra-violet resistant plastic
- \* Insulating

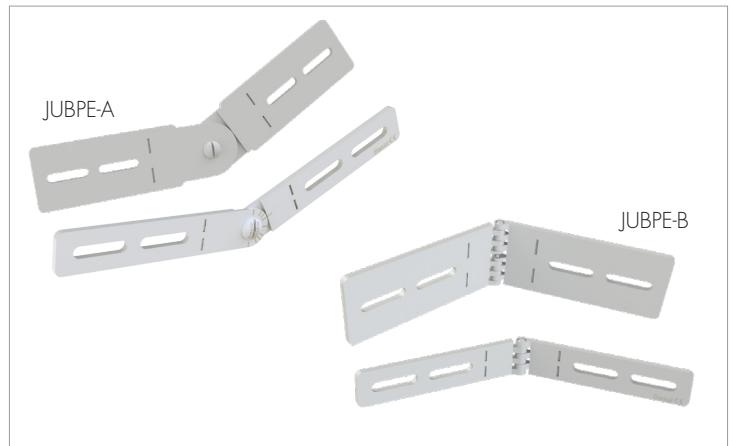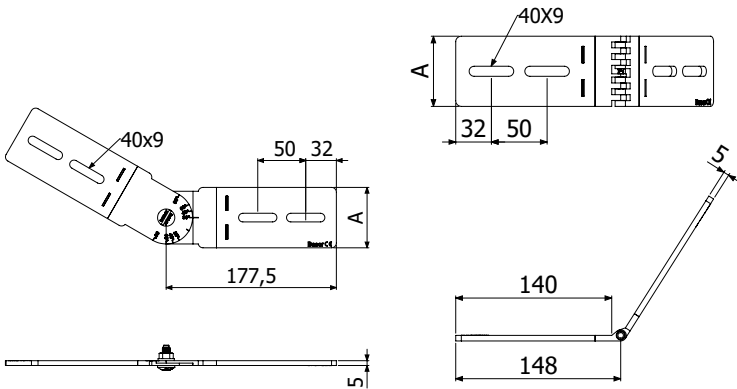

| Model End cover | H      |     | Weight<br>LBS/EA | PVC M1 UV<br>REF. PVC |
|-----------------|--------|-----|------------------|-----------------------|
|                 | inch   | mm  |                  |                       |
| JUBPE-AB 2.3/8" | 2 3/8" | 60  | 0.16             | 223613                |
| JUBPE-AB 4"     | 4"     | 100 | 0.36             | 223614                |

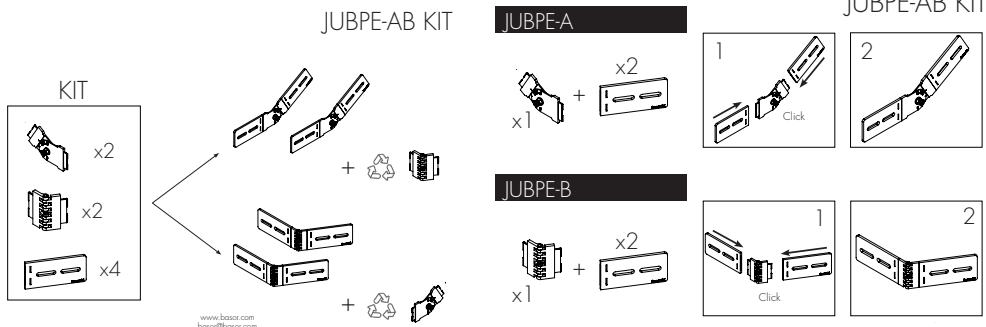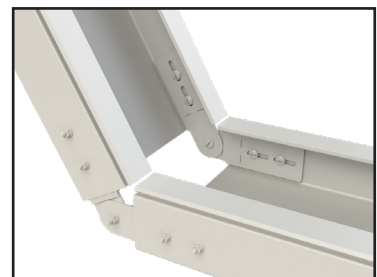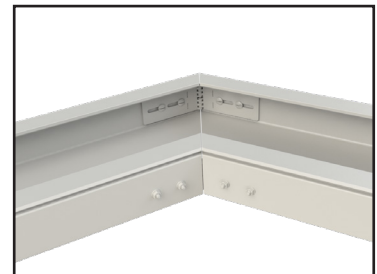


2 JUBPE-AB + 8/100 B2-P (2/10017)



# Specification Sheet

## Basorplast PSBPE

**3EBasor**  
CABLE TRAY SPECIALIST

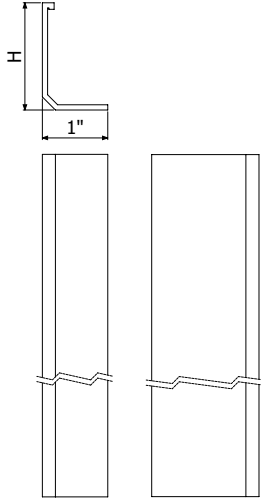

- \* Divider profile for PVC tray
- \* 2.3/8" and 4" high
- \* Non perforated model
- \* PVC M1 UV material
- \* Ultra-violet resistant plastic
- \* Insulating



UNE-EN 61537  
UNE-EN 50085



UNE-23727  
UNE-EN 61537  
UNE-EN 50085



UNE-EN 60695



MOD 60x100 10J  
UNE-EN 61537  
UNE-EN 50085



UNE-EN 61537  
UNE-EN 50085



OK



ISO/TR 10358  
DIN 8061

**RoHS**  
OK

| Model End cover | H      |     | Weight | PVC M1 UV |
|-----------------|--------|-----|--------|-----------|
|                 | inch   | mm  | LBS/EA | REF. PVC  |
| PSBPE 2.3/8"    | 2 3/8" | 60  | 1.32   | 2/10144   |
| PSBPE 4"        | 4"     | 100 | 2.43   | 2/10145   |




1 PSBPE + 4/100 B2-P (2/10017)

# Specification Sheet

## Basorplast SHG & SVG


**3E Basor**  
CABLE TRAY SPECIALIST

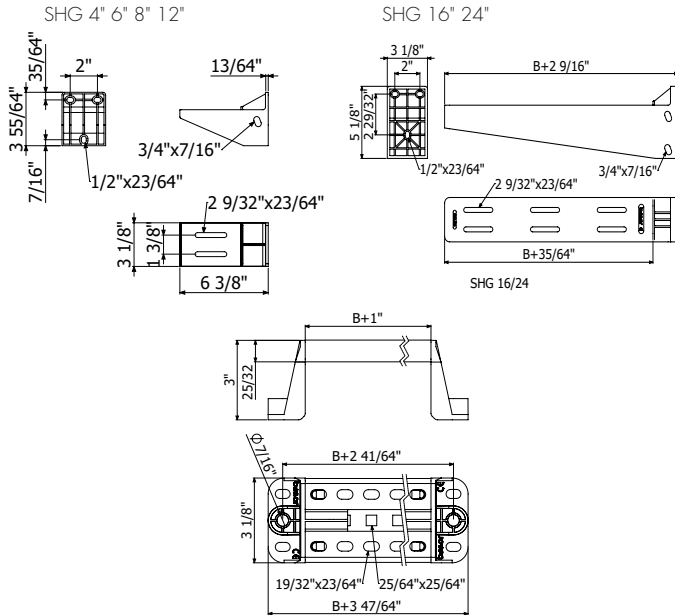



- \* Supports for PVC tray
- \* 4"-24" width
- \* Wall, floor or swing
- \* PVC M1 UV material
- \* Ultra-violet resistant plastic
- \* Insulating



SHG





SVG



**RoHS**  
OK



|         | H    |     | SWL    |        | Weight | PVC M1 UV |
|---------|------|-----|--------|--------|--------|-----------|
|         | inch | mm  | 104° F | 140° F | LBS/EA | REF.      |
| SHG 4"  | 4"   | 100 | 199    | 99     | 0.42   | 2/10011   |
| SHG 6"  | 6"   | 150 | 232    | 115    | 0.60   | 2/10012   |
| SHG 8"  | 8"   | 200 | 265    | 132    | 0.75   | 2/10013   |
| SHG 12" | 12"  | 300 | 287    | 145    | 1.19   | 2/10014   |
| SHG 16" | 16"  | 400 | 486    | 245    | 2.09   | 2/10015   |
| SHG 24" | 24"  | 600 | 397    | 200    | 2.43   | 2/10016   |

|         | H    |     | SWL |     | Weight | PVC M1 UV |
|---------|------|-----|-----|-----|--------|-----------|
|         | inch | mm  | Lb  | Kg  | LBS/EA | REF.      |
| SVG 4"  | 4"   | 100 | 846 | 384 | 0.50   | 2/10050   |
| SVG 6"  | 6"   | 150 | 846 | 384 | 0.58   | 2/10051   |
| SVG 8"  | 8"   | 200 | 846 | 384 | 0.62   | 2/10052   |
| SVG 12" | 12"  | 300 | 450 | 204 | 0.73   | 2/10053   |
| SVG 16" | 16"  | 400 | 220 | 120 | 0.84   | 2/10054   |
| SVG 24" | 24"  | 600 | 180 | 60  | 1.06   | 2/10055   |

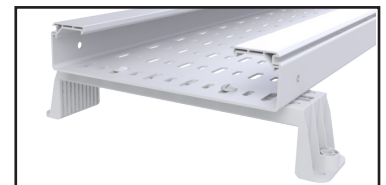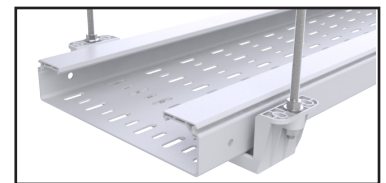


🔧 SVG/SHG + 2/100 B2-P (2/10017)

# Basorplast PSHG-PSHGR-KSHGR-CT2



- \* Profile & reinforced profile + head
- \* 24-80" length
- \* Roof system
- \* Metal painted material
- \* Ultra-violet resistant
- \* Non insulating

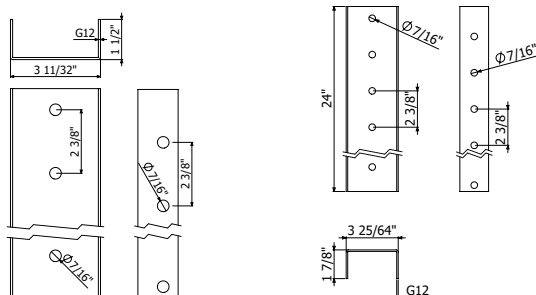

UNE-EN 61537  
UNE-EN 50085



UNE-23727  
UNE-EN 61537  
UNE-EN 50085



UNE-EN 60695



MOD 60x100 10.  
UNE-EN 61537  
UNE-EN 50085




UNE-EN 61537  
UNE-EN 50085



OK

**RoHS**  
  
**OK**

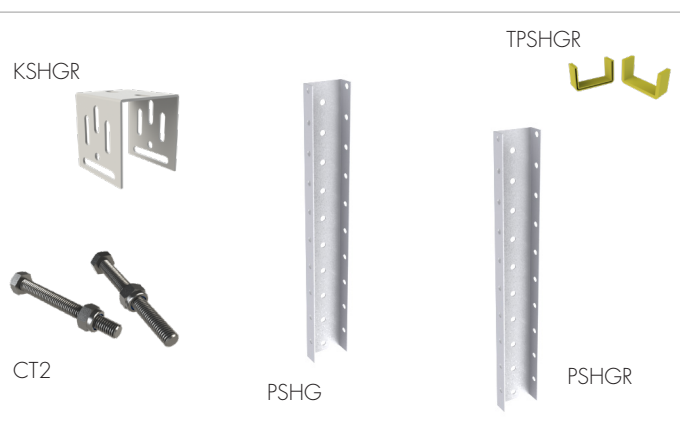

|             | Weight | PVCM1 UV |
|-------------|--------|----------|
|             | LBS/EA | REF.     |
| KSHGR       | 1.35   | 2/17282  |
| PSHG 2M     | 5.05   | 2/17281  |
| PSHGR 24"   | 4.50   | 2/17283  |
| TFSHGR PVC  | 0.10   | 2/7228   |
| CT2 M10X100 | 0.25   | 2/7228   |

|            |       |                                                                                     |                |
|------------|-------|-------------------------------------------------------------------------------------|----------------|
| PSHGR      | KSHGR |  | 4x B2 i304     |
| SG 100-300 | KSHGR |  | 1x CT2 M10x100 |
| SG 400-600 | KSHGR |  | 2x CT2 M10x100 |




## Specification Sheet

NOTES





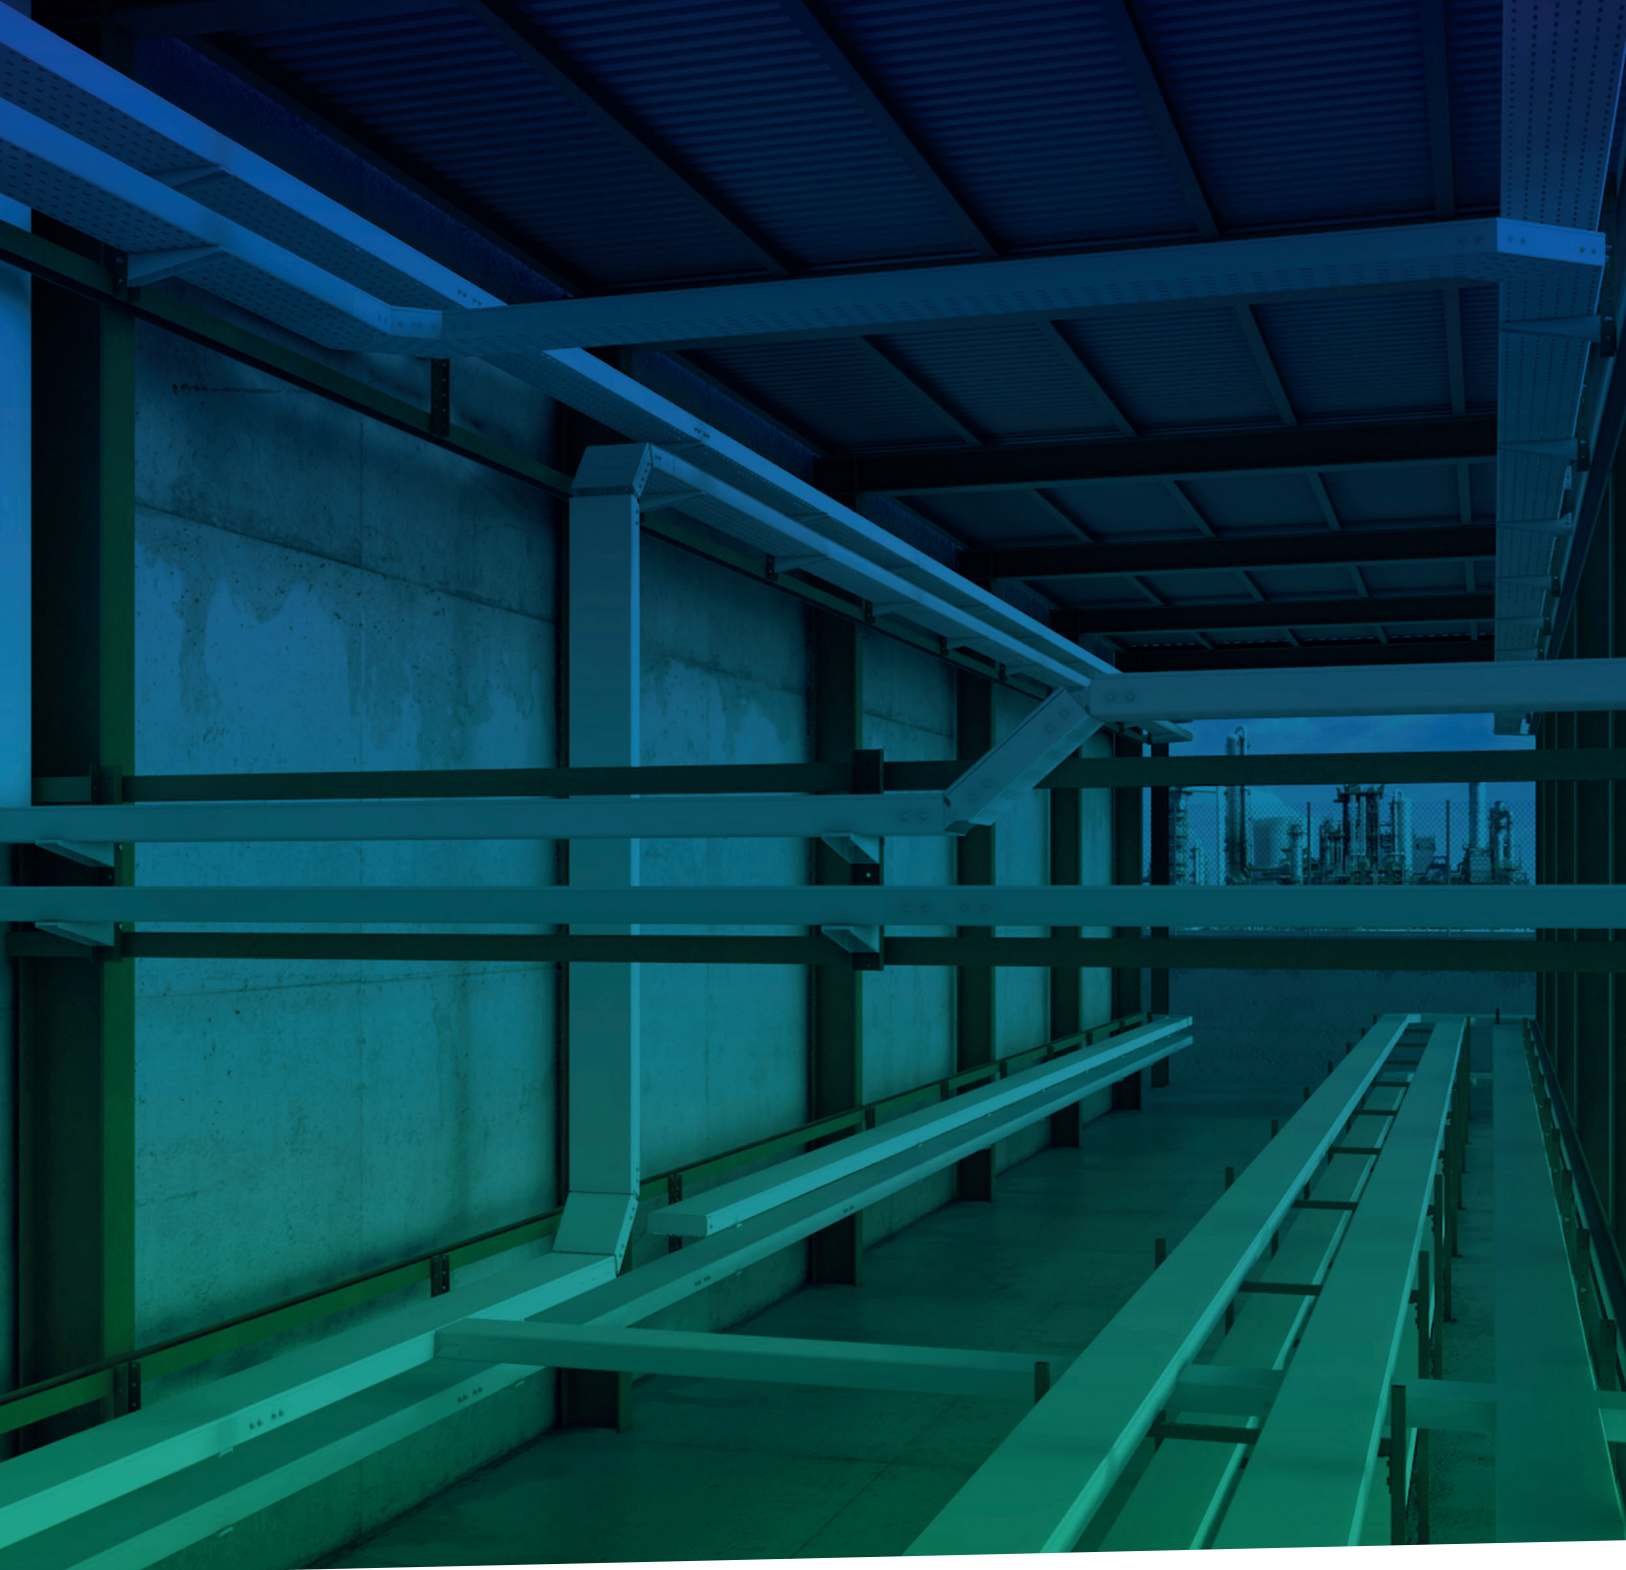

# BE Basor

CABLE TRAY SPECIALIST



Basor Electric SA



@Basorelectric



/Basorelectric



[www.basor.com](http://www.basor.com)

Basor Electric Inc. 604 South Mulberry Street, Suite 100 - Milstadt, IL 62260  
TEL. 618.476.6300 \* FAX. 618.476.6301 \* TOLL FREE 844.393.3985  
[www.basor.us](http://www.basor.us) / [www.basor.com](http://www.basor.com)