

FIBERTRAV EFV

FIBERGLASS CABLE LADDER

Valid for Autodesk Revit 2015 or Later

To use our models you can copy and paste them in your project.

Autodesk Revit has limitations in 3D modeling, so each model is an approximation of our products.

Cable ladders are system components that they can't be modified. You can choose the height, the length and the rung spacing that appears in our catalogue, but the width of our cable ladders rungs (without rail's width) correspond to the total width of Revit cable ladders. And the fittings have our correct width.

Fittings are placed automatically (except junctions). To use fittings with different radius to 12" or different angle to 90° place it by hand. Accessories have to be placed by hand. It is important read the type comments to know how to place the pieces.

In each model you can find the information about it: manufacturer, contact, reference code, model name, certificates, description, url, pieces you need for the assembly, image, image url and comments about the collocation.

You can obtain planing tables with the information about the models used and quantities.

Using Dynamo script you can obtain the reference code of the cable ladders and fittings and check if the models size is correct.

It is suitable and safe for the intended use and it is in conformity with UNE EN IEC 61537 and NEMA GF1.


<https://www.basor.com/ecatalogo/index.php?idioma=2&pk=708>

Characteristics of the cable ladder:

- Non metallic System
- Temperature Range: -50°C y 105°C
- Without electrical continuity
- Electrical insulating component
- High level of protection against corrosive or polluting substances
- Self-extinguishing and non-flame propagating component
- Reaction to fire, smoke opacity and toxicity M2F1 according to NF 16101
- Flame Spread and Smoke Development Class1 according to ASTM E84
- UL-94-VO Class
- Halogen Free
- Comply with ROHS2, 2011/65/EU
- Comply with REACH 18/12/2016
- Resistant to UV radiation. Excellent behaviour in outdoor installation.
- High Load-Resistance/Weight ratio
- Impact Strength: 20J.

Material: Reinforced polyester Fiberglass (PRFV)

Headquarters BASOR ELECTRIC :
P.I.Alcodar Avda. Alcodar, 45-47
46701 Gandia (Valencia)
Tel.: +34 962 876 695

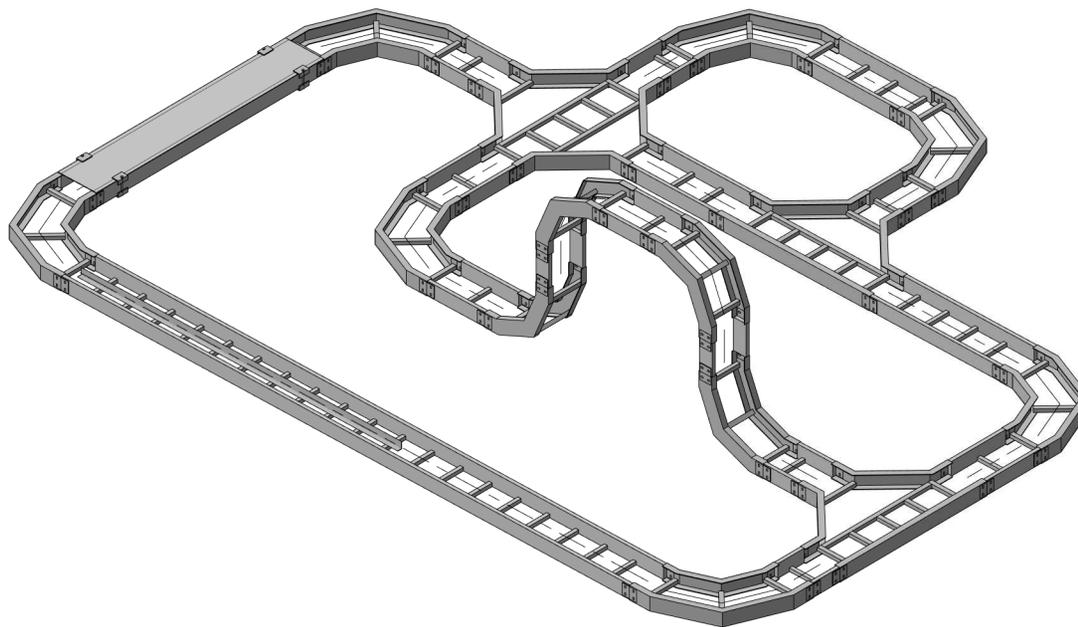

For any technical question please contact in the following ways: basor@basor.com // www.basor.com/ecatalogo/

BEBasor
CABLE TRAY SPECIALIST

www.basor.com