



EU DECLARATION OF CONFORMITY
DECLARACIÓN UE DE CONFORMIDAD

3EBasor
CABLE TRAY SPECIALIST
www.basor.com

The company / La Empresa:

BASOR ELECTRIC, S.A.

Address / Dirección:

Av. Alcodar, 45-47, 46700. Gandía (VLC), Spain.

Declares that the product:

Declara que el producto:

BASORSUPPORT C-SHOT

Installed in accordance to the installation standards, manufacturer's instructions and professional rules, duly maintained and used for the applications as intended.

Instalado de acuerdo con las normas de instalación, instrucciones del fabricante y conforme a las reglas profesionales, debidamente mantenido y utilizado en las aplicaciones para las que está previsto.

Complies with the essential requirements of the Council Directives:

Cumple con los requisitos esenciales de las Directivas del Consejo:

2014/35/UE (Low Voltage Directive) / (Directiva de Baja Tensión)

Incorporated in the Spanish Legislation in: R.D. 187/2016.

Incorporado en la Legislación Española en: R.D. 187/2016.

And it is suitable and safe for the intended use and it is in conformity with the following standard:

Es adecuado y seguro para el uso a que está destinado y es conforme con la siguiente norma:

UNE EN 61537

Additional information:

Información adicional:

This product is intended to be installed and maintained by skilled persons, it may be used by ordinary persons only as a replacement part, to substitute for an identical device.

Este producto está previsto para ser instalado y mantenido por un profesional, puede ser usado por una persona no formada para reemplazamiento de uno idéntico.

Place and date:

Lugar y fecha:

Gandía May 2016

Gandía Mayo 2016

Technical Department / Departamento técnico




Certificate N° 3198065/11



Certificate N° 3198065/12

C-SHOT CEILING SUPPORT

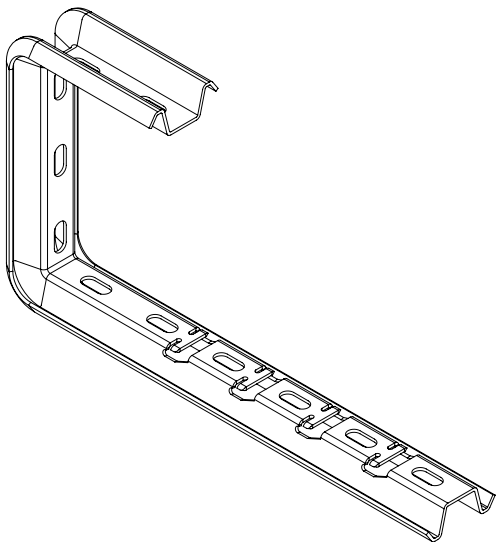

Models (B):

100; 150; 200; 300

Finishes: PG, HDG


Characteristics:

- Metallic
- Non-flame propagating component
- With electrical continuity
- Electrically conductive component
- Minimum temperature of -50 °C
- Maximum temperature of 150 °C
- With metallic coating, resistance to corrosion:

PG coating: class 3

HDG coating: class 6

ASSEMBLING INSTRUCTIONS

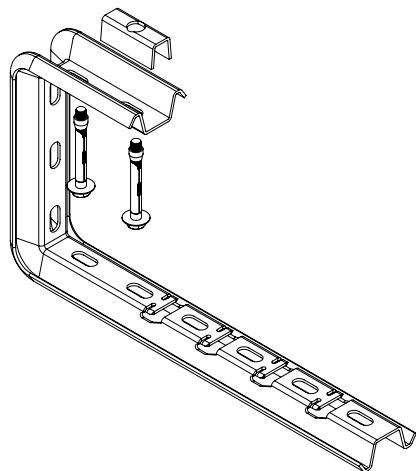

- For the assembly of the support, two anchorages are needed, and PSHO Supporting Piece is used to reinforce the fixation on the ceiling.
- This support had been designed so that one sole component allows the assembly of the tray or closed cable tray on to the ceiling.
- The C-SHOT support had been designed to have the minimum free height which allows the installation of the cables.
- C-SHOT supports are used as horizontal supports for ERE, BF and BFR cable trays.
- To set up ERE cable trays B1 bolts are needed.
- To set up the trays BF/BFR there is no need of using hardware. Theses trays are fastened by tightening flanges with a flat screwdriver.

SAFE WORKING LOAD

