


BOX UNIVERSAL BRACKET (SUC)

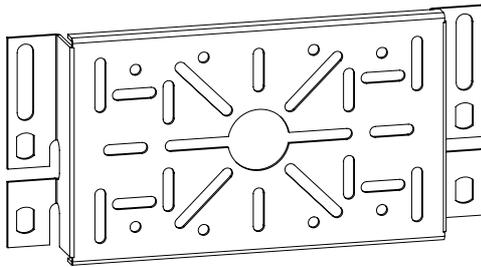


Finishes: PG, HDG, SS304.

Characteristics:

- Metallic
- No-flame propagating component
- System with electrical continuity
- Electrically conductive component
- Minimum temperature of -50 °C
- Maximum temperature of 150 °C
- With metallic coating, resistance to corrosion:
 - PG coating: class 3
 - HDG coating: class 5
 - SS304 coating: class 9A

MOUNTING INSTRUCTIONS

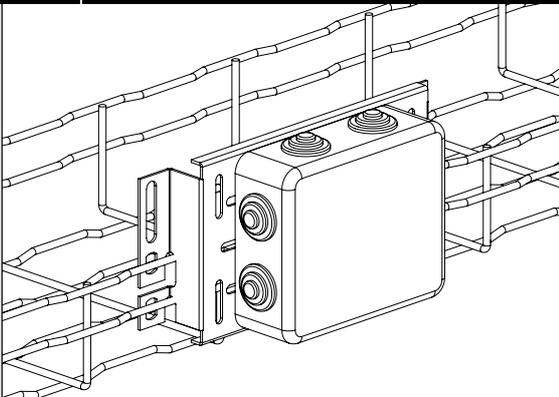

- The box universal bracket (SUC) for Basorfil trays is used for fixing watertight boxes.
- To set the SUC to the tray is not necessary to use any additional element, the tabs are folded using a flathead screwdriver.
- Allowed settings:
 - Square shaped side variable 29-70 mm
 - Rectangle shaped 79 x 50, 98 - 128x50, 15-55 x 82 mm
 - Punched online from 30 to 147 mm