


BASORFIL BFR H 1_1/2" ST304/316




L = 10 FT / 3 m

DESCRIPTION	Width		SWL		STAINLESS STEEL 304			STAINLESS STEEL 316		
	inch	mm	(Lbs/ft) d=5ft	(kg/m) d=1,5	REF.	kg/m	LBS/FT	REF.	kg/m	LBS/FT
BFR-4"x 1_1/2"	4"	100	17	25	2/0303	0,66	0,44	2/7415	0,66	0,44
BFR-6"x 1_1/2"	6"	150	17	25	2/0304	0,72	0,48	2/7416	0,72	0,48
BFR-8"x 1_1/2"	8"	200	17	25	2/0305	1,02	0,68	2/7417	1,02	0,68
BFR-12"x 1_1/2"	12"	300	17	25	2/0306	1,39	0,93	2/7418	1,39	0,93

To assemble the cable trays, it is necessary to use a bolt-staple set for each of the cable tray's side, with reference number 2/4915 in ST304.

In SS316 on request.


drawn in mm.

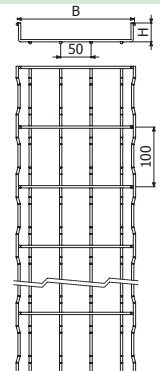

BASORFIL BFR H 2" ST304/316



L = 10 FT / 3 m




L = 10 FT / 3 m

DESCRIPTION	Width		SWL		STAINLESS STEEL 304			STAINLESS STEEL 316		
	inch	mm	(Lbs/ft) d=5ft	(kg/m) d=1,5	REF.	kg/m	LBS/FT	REF.	kg/m	LBS/FT
BFR 2"x2"	2"	60	21	32	2/0307	0,66	0,44	2/7419	0,66	0,44
BFR 4"x2"	4"	100	38	57	2/0308	0,96	0,64	2/7420	0,96	0,64
BFR 6"x2"	6"	150	38	57	2/0309	1,02	0,68	2/7421	1,02	0,68
BFR 8"x2"	8"	200	38	57	2/0310	1,32	0,88	2/7422	1,32	0,88
BFR 12"x2"	12"	300	38	57	2/0311	1,69	1,1267	2/7423	1,69	1,1267
BFR 16"x2"	16"	400	38	57	2/0312	2,05	1,3667	2/7424	2,05	1,3667
BFR 20"x2"	20"	500	43	65	2/0313	2,41	1,6067	2/7426	2,41	1,6067
BFR 24x2"	24"	600	43	65	2/0314	2,77	1,85	2/7426	2,77	1,85


To assemble cable trays with a width which is lower or equal to 8", it's necessary to use a bolt-staple set for each of the cable tray's side, with reference number 2/4915 in ST304. For wider cable trays, an additional bolt-staple set shall be used as a central union joint too.

In SS316 on request.

drawn in mm.

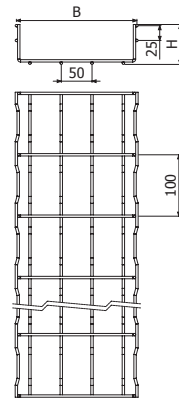

BASORFIL BFR H 4" ST304/316




L = 10 FT / 3 m

DESCRIPTION	Width		SWL		STAINLESS STEEL 304			STAINLESS STEEL 316		
	inch	mm	(Lbs/ft) d=5ft	(kg/m) d=1,5	REF.	kg/m	LBS/FT	REF.	kg/m	LBS/FT
BFR 8"x4"	8"	200	51	76	2/0315	1,69	1,13	2/7427	1,69	1,13
BFR 12"x4"	12"	300	51	76	2/0316	2,05	1,37	2/7428	2,05	1,37
BFR 16"x4"	16"	400	55	83	2/0317	2,41	1,61	2/7429	2,41	1,61
BFR 20"x4"	20"	500	55	83	2/0318	2,77	1,85	2/7430	2,77	1,85
BFR 24"x4"	24"	600	55	83	2/0319	3,14	2,09	2/7431	3,14	2,09

To assemble cable trays with a width which is lower or equal to 8", it's necessary to use a bolt-staple set for each of the cable tray's side, with reference number 2/4915 in St304. For wider cable trays, an additional bolt-staple set shall be used as a central union joint too.

In SS316 on request.

drawn in mm.



BASORFIL BFR H 6" ST304/316




L = 10 FT / 3 m

DESCRIPTION	Width		SWL		STAINLESS STEEL 304			STAINLESS STEEL 316		
	inch	mm	(Lbs/ft) d=5ft	(kg/m) d=1,5	REF.	kg/m	LBS/FT	REF.	kg/m	LBS/FT
BFR 8"x6"	8"	200	51	76	UR	2,05	1,37	UR	2,05	1,37
BFR 12"x6"	12"	300	51	76	UR	2,41	1,61	UR	2,41	1,61
BFR 16"x6"	16"	400	55	83	UR	2,77	1,85	UR	2,77	1,85
BFR 20"x6"	20"	500	55	83	UR	3,14	2,09	UR	3,14	2,09

To assemble cable trays with a width which is lower or equal to 8", it's necessary to use a bolt-staple set for each of the cable tray's side, with reference number 2/4915 in St304. For wider cable trays, an additional bolt-staple set shall be used as a central union joint too.

In SS316 on request.

drawn in mm.



UR=Upon Request