

**EU DECLARATION OF CONFORMITY**
DECLARACIÓN UE DE CONFORMIDAD

Certificado Nº SGI 3198065/11

Certificado Nº SGI 3198065/12

The company / *La Empresa:***BASOR ELECTRIC, S.A.**Address / *Dirección:*

Av. Alcodar, 45-47, 46700. Gandía (VLC), Spain.

Declares that the product:

*Declara que el producto:***BASORFLEX FLEXL**

Installed in accordance to the installation standards, manufacturer's instructions and professional rules, duly maintained and used for the applications as intended.

Instalado de acuerdo con las normas de instalación, instrucciones del fabricante y conforme a las reglas profesionales, debidamente mantenido y utilizado en las aplicaciones para las que está previsto.

Complies with the essential requirements of the Council Directives:

*Cumple con los requisitos esenciales de las Directivas del Consejo:***2014/35/UE (Low Voltage Directive) / (Directiva de Baja Tensión)**

Incorporated in the Spanish Legislation in: R.D. 187/2016.

Incorporado en la Legislación Española en: R.D. 187/2016.

And it is suitable and safe for the intended use and it is in conformity with the following standard:

*Es adecuado y seguro para el uso a que está destinado y es conforme con la siguiente norma:***UNE EN 61386-1****UNE EN 61386-23**

Additional information:

Información adicional:

This product is intended to be installed and maintained by skilled persons, it may be used by ordinary persons only as a replacement part, to substitute for an identical device.

Este producto está previsto para ser instalado y mantenido por un profesional, puede ser usado por una persona no formada para reemplazamiento de uno idéntico.

Place and date:


Lugar y fecha:

Gandía April 2016

*Gandía Abril 2016*Technical department / *Departamento Técnico*



FLEXL

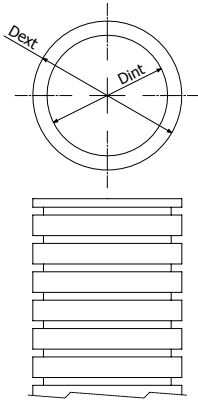

Models:

07/10, 10/13, 12/16, 14/18, 17/21, 23/28, 29/34, 36/42, 48/54.

Material: PA6 RAL7016 (grey); PA6 RAL9011 (black)

Characteristics:

- Code: 243240000010.
- Thermoplastic flexible tube.
- Thermoplastic halogen free, low smoke level and low toxicity.
- Compression Strength: 320N.
- Impact Strength: 6J to -20°C.
- Electrical insulating product.
- Minimum temperature: -40°C in static applications and -20°C in dynamic applications.
- Maximum temperature: +120°C in static applications and 100°C in dynamic applications.
- Non-flame propagating material, self-extinguishing.
- Comply with RoSH, 2011/65/EU.
- UV resistant material. Excellent behaviour in outdoor installations.

MOUNTING INSTRUCTIONS

- Ideal for electrical installations in motion.
- Halogen-free, in case of fire the smoke is not toxic.