




Certificado Nº SGI 3198065/11



Certificado Nº SGI 3198065/12

## MULTIPLE CABLE CLAMPS

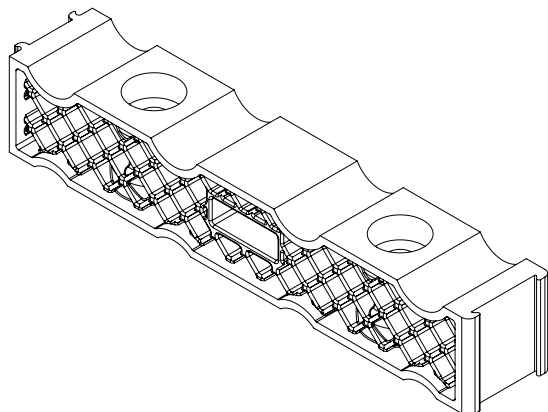


Models: 12-32; 32-48.

Material: PAFV (black colour)

Characteristics of the product:

- Halogen free with low smoke emission.
- Resistance to corrosion and aging:  
Resistant to oils, UV, ozone, salts, moisture, humidity, acids and even nuclear radiation.
- Fire behaviour:  
Self Extinguishing V0 acc. to UL94.
- Minimum Temperature: -40 °C.
- Maximum Temperature: 120 °C (up to 225 °C momentarily)
- Mechanical Strength: 29,5 kN.
- Vertically stackable.
- Horizontally clippable (to fix more than 4 cables).

## ASSEMBLY INSTRUCTIONS

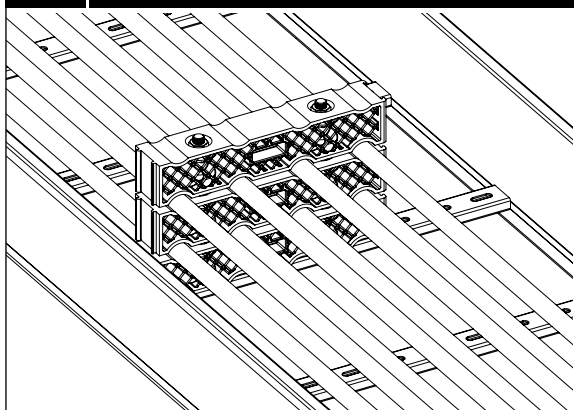

- Multiple cable clamps allow the assembly of every type of cable or conduit with an external diameter from 12 to 48 mm.
- 13 mm perforation for up to M12 hardware with internal hole to place the intermediate nuts.
- Every block has 4 cable positions but clipping horizontally more lines can be fixed.
- The stackable system allows an easy amplification of the installation if necessary.

