




OUTSIDE SUSPENSION SEER

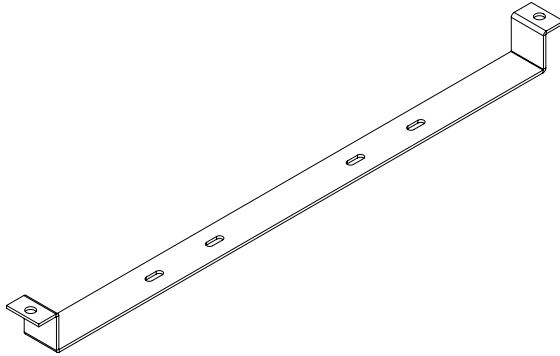

Compatible with models: ERE perforated 500x60, 600x60,

Finishes: PG, HDG.


Characteristics:

- Metallic system
- Non-flame propagating component
- System with electrical continuity characteristic
- Electrically conductive component
- Minimum temperature of -50 °C
- Maximum temperature of 150 °C
- With metallic coating, resistant to corrosion:

PG: class 3

HDG: class 6

INSTRUCTIONS FOR USE

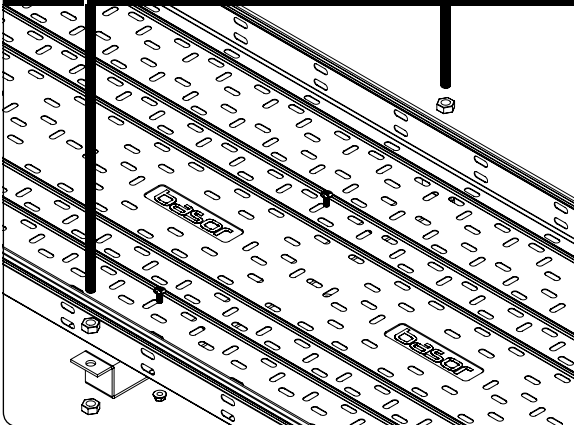

- The ceiling mounting of perforated ERE trays with outside suspension requires, by fixing point: 1 outside suspension SEER, 4 M10 DIN934 nuts, 2 VR M10 threaded rods, and 2 Bolt set B1.
- The outside suspension SEER, thanks to the fact that it is independent of the rod fixing nuts, will allow you to change the mounting position and screwed position without having to rotate the whole piece.