



EU DECLARATION OF CONFORMITY  
DECLARACIÓN UE DE CONFORMIDAD

**3EBasor**  
CABLE TRAY SPECIALIST

www.basor.com



Certificado Nº SGI 3198065/11



Certificado Nº SGI 3198065/12

The company / La Empresa:

**BASOR ELECTRIC, S.A.**

Address / Dirección:

Av. Alcodar, 45-47, 46700. Gandía (VLC), Spain.

Declares that the product:

*Declara que el producto:*

**BASORSUPPORT SHST**

Installed in accordance to the installation standards, manufacturer's instructions and professional rules, duly maintained and used for the applications as intended.

*Instalado de acuerdo con las normas de instalación, instrucciones del fabricante y conforme a las reglas profesionales, debidamente mantenido y utilizado en las aplicaciones para las que está previsto.*

Complies with the essential requirements of the Council Directives:

*Cumple con los requisitos esenciales de las Directivas del Consejo:*

**2014/35/UE (Low Voltage Directive) / (Directiva de Baja Tensión)**

Incorporated in the Spanish Legislation in: R.D. 187/2016.

*Incorporado en la Legislación Española en: R.D. 187/2016.*

And it is suitable and safe for the intended use and it is in conformity with the following standard:

*Es adecuado y seguro para el uso a que está destinado y es conforme con la siguiente norma:*

**UNE EN 61537**

Additional information:

*Información adicional:*

This product is intended to be installed and maintained by skilled persons, it may be used by ordinary persons only as a replacement part, to substitute for an identical device.

*Este producto está previsto para ser instalado y mantenido por un profesional, puede ser usado por una persona no formada para reemplazamiento de uno idéntico.*

Place and date:

*Lugar y fecha:*

Gandía April 2016


*Gandía Abril 2016*

Technical department / Departamento Técnico

UNE-EN 61537  
REV.18/05/2018




**SHST**



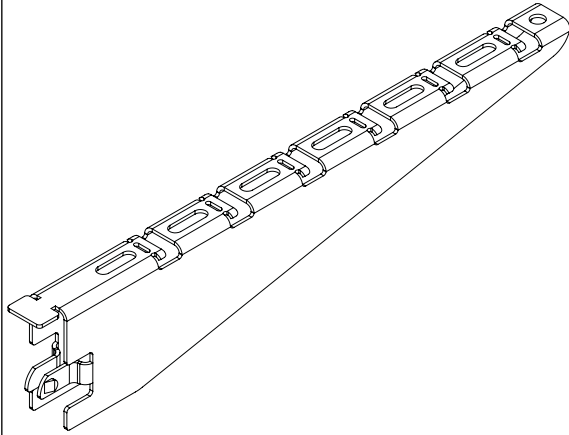


- Models (B):  
100; 150; 200; 300; 400; 500; 600.
- Finishes: PG; HDG.
- Characteristics:
- Metallic
  - Non-flame propagating component
  - System with electrical continuity
  - Electrically conductive component
  - Minimum temperature of -50 °C
  - Maximum temperature of 150 °C
  - With metallic finishes, resistance to corrosion:
    - PG coating: Class 3
    - HDG coating: Class 6

**INSTRUCTIONS FOR USE**

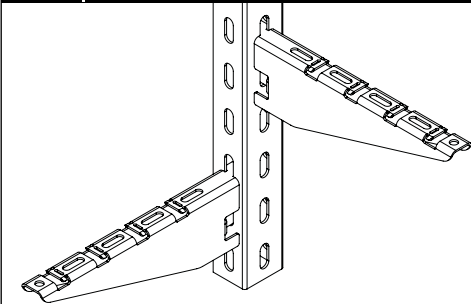


- This support can be mounted with the SP3S support.
- To mount this support is not necessary to use screws. First of all, the top tab has to be inserted through the profile hole (Step 1). Then it has to be rotated 90° (Step 2) and finally introduce the lower lashes until a click sound (Step 3)
- To assembly cable trays to the support is required the B1 Set.
- To assembly wire mesh cable trays, the wire rods have to be inserted in their position and then fix the pins with a flathead screwdriver.

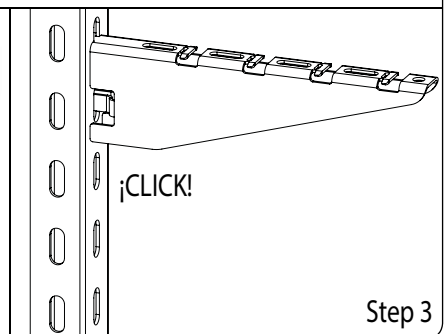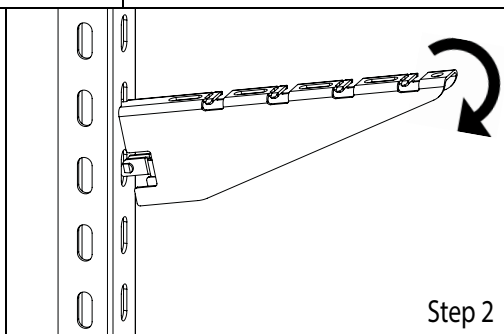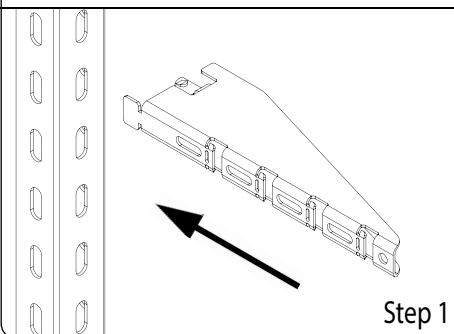


**SAFE WORKING LOAD**

SHST 100-200

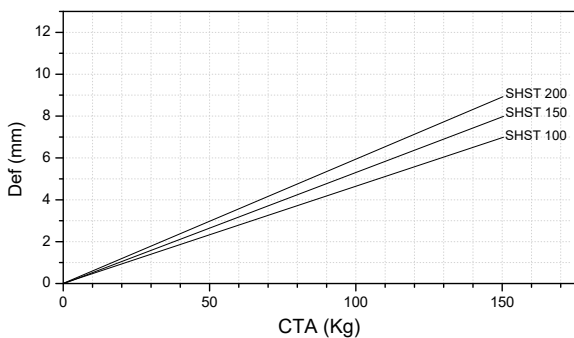

SHST 300-600

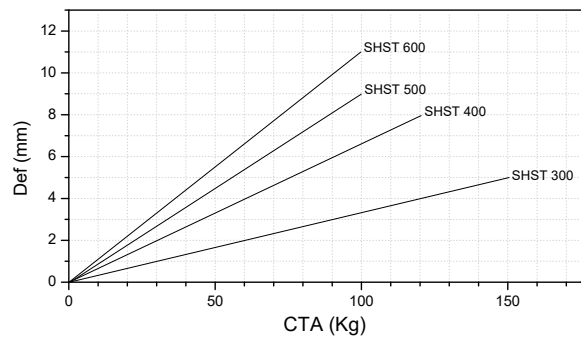

This technical data sheet issued accordingly to the fulfillment of the product Standard, is itself a necessary analyses of the electric risks according to the low tension Directive 2014/35/UE of February 26th 2014, in effect from April 20th 2016