

DECLARATION OF CONFORMITY  
*DECLARACIÓN DE CONFORMIDAD*

**BE basor**  
E L E C T R I C

www.basor.com



Certificado Nº SGI 3198065/11



Certificado Nº SGI 3198065/12

The company / *La Empresa:*

**BASOR ELECTRIC, S.A.**

Address / *Dirección:*

Av. Alcodar, 45-47, 46700. Gandía (VLC), Spain.

Declares that the product:

*Declara que el producto:*

**BASORSUPPORT SV**

Installed in accordance to the installation standards, manufacturer's instructions and professional rules, duly maintained and used for the applications as intended.

*Instalado de acuerdo con las normas de instalación, instrucciones del fabricante y conforme a las reglas profesionales, debidamente mantenido y utilizado en las aplicaciones para las que está previsto.*

Complies with the essential requirements of the Council Directives:

*Cumple con los requisitos esenciales de las Directivas del Consejo:*

**2014/35/UE (Low Voltage Directive) / (Directiva de Baja Tensión)**

Incorporated in the Spanish Legislation in: R.D. 7/1988 and its modification R.D. 154/1995.

*Incorporado en la Legislación Española en: R.D. 7/1988 y su modificación R.D. 154/1995.*

And it is suitable and safe for the intended use and it is in conformity with the following standard:

*Es adecuado y seguro para el uso a que está destinado y es conforme con la siguiente norma:*

**UNE EN 61537**

Additional information:

*Información adicional:*

This product is intended to be installed and maintained by skilled persons, it may be used by ordinary persons only as a replacement part, to substitute for an identical device.

*Este producto está previsto para ser instalado y mantenido por un profesional, puede ser usado por una persona no formada para reemplazamiento de uno idéntico.*

Place and date:

*Lugar y fecha:*

Gandía April 2016


*Gandía Abril 2016*

Technical department / *Departamento Técnico*

UNE-EN 61537  
REV.20/04/2016



**SV**

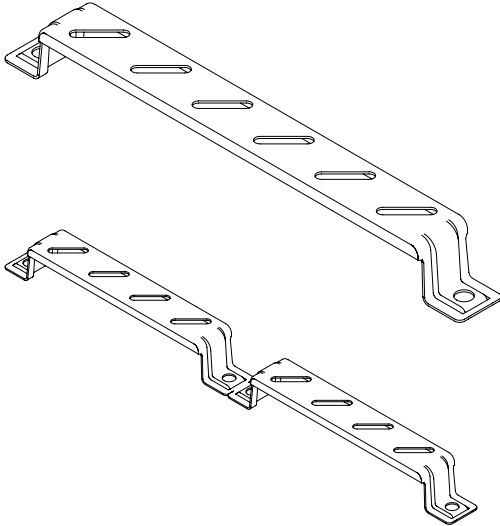

**Models (B):**

100; 150; 200; 300; 400; 500; 600.

Finishes: PG; HDG; GSP.

**Characteristics:**

- Metallic (GSP composite)
- Non-flame propagating component
- System with electrical continuity
- Electrically conductive component
- Minimum temperature of -50 °C
- Maximum temperature of 150 °C
- With a metallic finishes, resistance to corrosion:


PG coating: Class 3

HDG coating: Class 6

GSP coating: Class 8

Note: With GSP coating only models 100,150,200,300.

**MOUNTING INSTRUCTIONS**

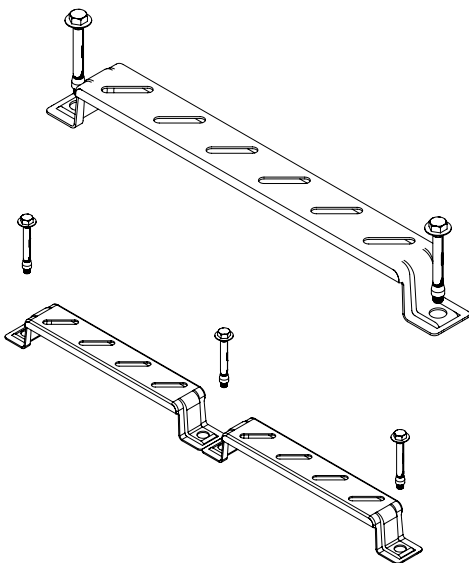

- For mounting the support, two floor anchorages are needed, and three in the case of doubles (models 400, 500 and 600)
- The trays are fixed onto the support using B1 sets.

**SAFE WORKING LOAD**

B	SWL (kg)
100	276
150	265
200	253
300	207
400	506
500	460
600	414