

SPRING NUT TM41


REV.10/09/2018



Certificado Nº SGI 3198065/11

Certificado Nº SGI 3198065/12

SPRING NUT TM41

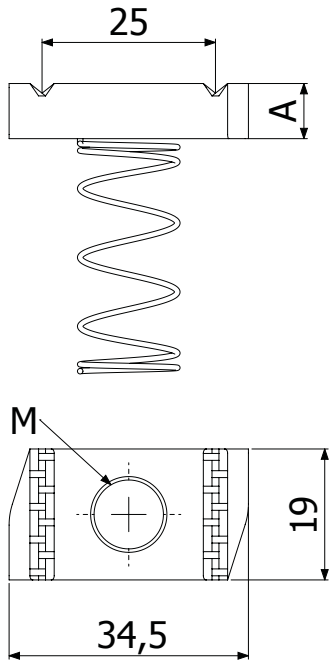

Models:

M6; M8; M0; M12

Material: EZ, HDG, SS316

Characteristics:

- Electrolytic galvanizing according to UNE EN ISO 4042 with zinc minimum thickness of 8µm and manufacturing environment of 12 µm
- Hot dip galvanized according to UNE EN ISO 1461 with a minimum local thickness of 45µm and minimum manufacturing environment of 55µm
- Stainless steel ss316 (A4)
- With electrical continuity
- Metric threaded
- Complies with RoHS, 2011/65/UE directive.

M	A(mm)	Torque (N.m)
M6	6	10
M8	6	25
M10	8	40
M12	8	29

MOUNTING INSTRUCTIONS

- The spring nut TM41 is designed to be used with 41/82 profile family.
- The spring allows to regulate and maintain the position without effort to fix any piece
 1. Insert the spring nut into the profile.
 2. Turn it 90° until it is perpendicular to the direction of the profile.
 3. Move it to the desired position.



WORKING LOAD

	kg			
	M6	M8	M10	M12
F traction	500	600	700	700
F sliding	100	240	350	400