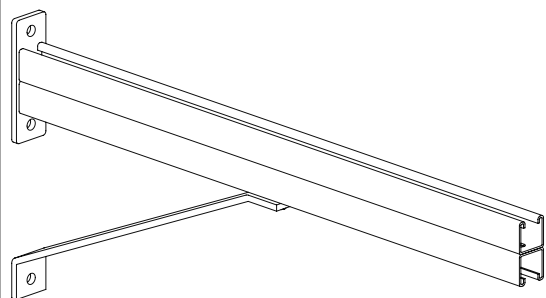
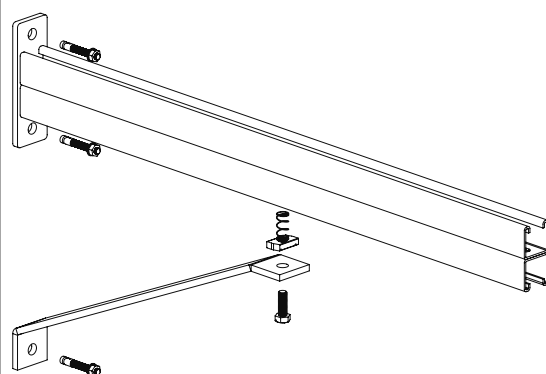


**SPD+Reinforcement 450x8** HORIZONTAL SUPPORT**Models (B):**

500; 600; 700; 800; 1000; 1500.

**Material/Coating:** HDG**Characteristics:**

- Metallic
- Non-flame propagating component
- System with electrical continuity
- Electrically conductive component
- Minimum temperature of -50 °C
- Maximum temperature of 150 °C
- With metallic coating, resistance to corrosion:  
HDG coating: class 6

**ASSEMBLY INSTRUCTIONS**

- To mount the support to the wall 2 BASORFIX SCM 12x75 are needed in SPD support and another one in the reinforcement.
- To fix the reinforcement to the SPD support one Spring Nut M10 and 1 bolt M10x30 DIN 933 are needed.
- The tray installation for an electrical system should NOT run under other types of canalisation such as water, vapour or gas.
- To guarantee a good ventilation we recommend installing the trays keeping a minimum distance of 250 mm between each tray.
- Trays which are placed on supports shall have to keep a gap of 20 mm from the wall to allow for a correct ventilation of the cables.
- To assembly trays/ladders to the support BASOR recommends sprig nuts.

**SAFE WORKING LOAD**

		MODEL					
		500	600	700	800	1000	1500
SWL	kg	1123	950	823	726	588	275
Deflection	mm	15	17	20	23	29	30