


UNICANAL PERFORADO 41X21




L = 3 m

DESCRIPCIÓN	e mm	A cm2	Wx cm3	Wy cm3	GS		GC	
					REF.	kg/m	REF.	kg/m
41X21 Cal.16	1,5	1,4	0,8	1,9	2/6366	1,26	-	1,35
41X21 Cal.12	2,5	2,1	1,1	2,7	2/0235	1,71	2/0236	1,8

Permite el uso de tornillos y varillas roscadas M10 ó 3/8".

Para más información consulte las fichas técnicas.

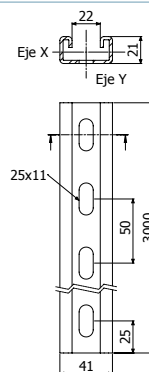

UNICANAL PERFORADO 41X41




L = 3 m

DESCRIPCIÓN	e mm	A cm2	Wx cm3	Wy cm3	GS		GC	
					REF.	kg/m	REF.	kg/m
41X41 Cal.16	1,5	2,7	2,7	3,7	2/6365	1,67	-	1,79
41X41 Cal.14	2	2,7	2,7	3,7	2/5500	2,02	-	-
41X41 Cal.12	2,5	3,1	3,2	4,5	2/0233	2,53	2/0234	2,66

Permite el uso de tornillos y varillas roscadas M10 ó 3/8".

Para más información consulte las fichas técnicas.

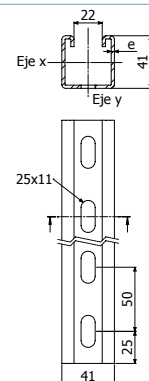

UNICANAL PERFORADO 82X41



L = 3 m

DESCRIPCIÓN	e mm	A cm2	Wx cm3	Wy cm3	CINCADO		GC	
					REF.	kg/m	REF.	kg/m
82X41 Cal.12	2,5	6,9	9,5	9,1	-	5,05	2/5573	5,31

Permite el uso de tornillos y varillas roscadas M10 ó 3/8".

Para más información consulte las fichas técnicas.

