



### UNICAL RA




DESCRIPCIÓN	B mm	H mm	C mm	e mm	A cm <sup>2</sup>	Wx cm <sup>3</sup>	Wy cm <sup>3</sup>	GS		GC	
								REF.	kg/m	REF.	kg/m
RA 35	35	14	21	1,5	0,9	0,28	1,00	2/0237	0,79	2/0238	0,869
RA 50	50	14	36	1,5	1,1	0,30	1,68	2/0239	0,99	2/0240	1,089


Para más información consulte las fichas técnicas.

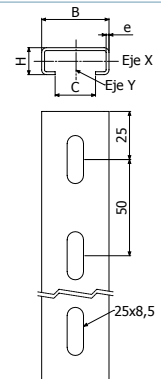

### UNION UNICAL RA

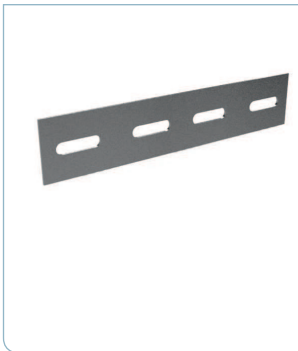

DESCRIPCIÓN	B mm	GS		GC	
		REF.	kg/ud	REF.	kg/ud
UNION RA 35	35	2/1122	0,07	2/1123	0,08
UNION RA 50	50	2/1124	0,11	2/3473	0,12



### UNICAL CT



DESCRIPCIÓN	B mm	H mm	C mm	e mm	A cm <sup>2</sup>	Wx cm <sup>3</sup>	Wy cm <sup>3</sup>	GS		GC	
								REF.	kg/m	REF.	kg/m
CT 40x20 L3	40	20	20	1,5	1,25	0,65	1,63	2/4471	0,99	2/0246	1,09
CT 40x20 L2	40	20	20	1,5	1,25	0,65	1,63	-	-	-	-
CT 20x10 L2	20	10	10	1,0	0,38	0,09	0,25	2/0242	0,34	-	-

Estos perfiles se pueden usar en configuración columpio fijándolos al techo mediante 2 varillas roscadas M8 ó 5/16" para el CT40 y varillas roscadas M6 ó varillas roscadas 1/4" para CT20, con 4 tuercas y sus anclajes a techo.

Para más información consulte las fichas técnicas.

