


CEILING SUSPENSION STBF 100x65

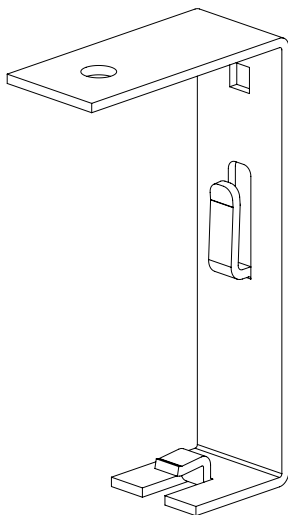


Compatible with models: BF 100x65, BFR 100x65, BF2R 100x65 y E-BFR 100x65.

Finishes: PG, HDG.

Characteristics:

- Metallic
- Non-flame propagating component
- System with electrical continuity
- Electrically conductive component
- Minimum temperature of -50 °C
- Maximum temperature of 150 °C
- With metallic coating, resistance to corrosion:
 - PG coating: class 3
 - HDG coating: class 6

MOUNTING INSTRUCTIONS

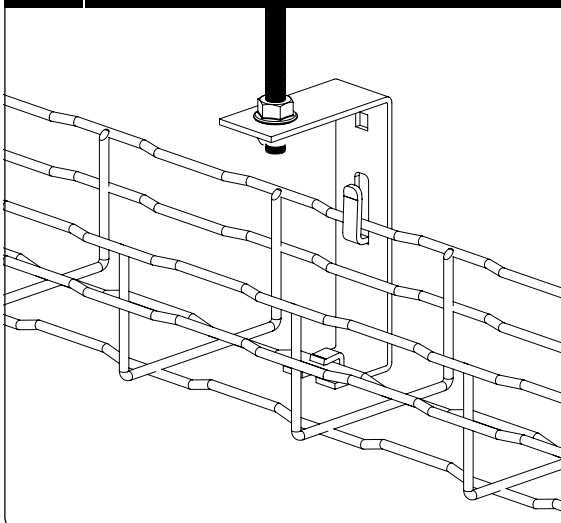

- The ceiling suspension BASORFIL 100x65 can be mounted directly to the ceiling with an anchor CCM 6x60 or with a threaded rod VR M8 and M8 nuts DIN 6923.
- The STBF has a hole in the side to allow the union of two parts using a B1 Set and perform a symmetrical assembly of two BASORFIL 100x65 trays.
- To assembly the tray to the ceiling suspension, firstly introduce the top rod of the tray on the side tab and then turn it to enter the base rod. Once introduced both tabs, press both tabs lightly with pliers to get adequate fixation.
- Maximum recommended distance between fixing points 1,5 m.

SAFE WORKING LOAD

ASSEMBLY	SWL (kg)
Direct to ceiling with an anchor	10
To ceiling using a threaded rod VR M8	8