




## CFBFR41

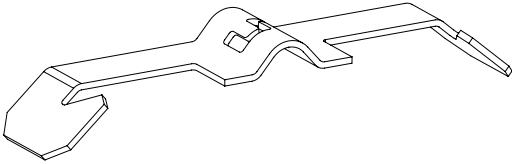


Finishes: HDG.

Characteristics:

- Metallic
- No-flame propagating component
- System with electrical continuity
- Electrically conductive component
- Minimum temperature of -50 °C
- Maximum temperature of 150 °C
- With metallic coating, resistance to corrosion:

HDG: class 5

## ASSEMBLY INSTRUCTIONS

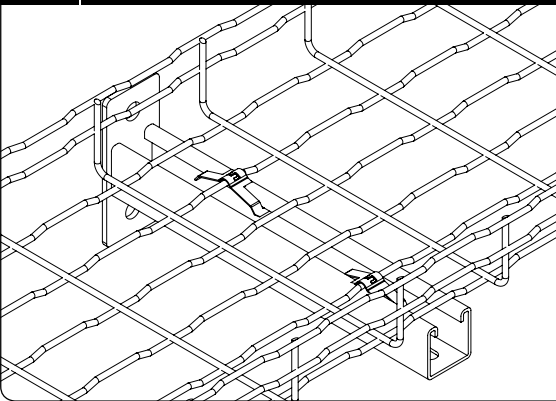

- Fixing Clamp CFBFR41 allows an easy fixation of BASORFIL wire-mesh cable trays to any profile of 41/82 family or supports SP, SP2, SPD2 and SPD.
- With CFBFR41 NO hardware and tools are needed.
- Use two CFBFR41 pieces in each support.