



EU DECLARATION OF CONFORMITY
DECLARACIÓN UE DE CONFORMIDAD

3EBasor

CABLE TRAY SPECIALIST

www.basor.com



Certificado Nº SGI 3198065/11



Certificado Nº SGI 3198065/12

The company / *La Empresa:*

BASOR ELECTRIC, S.A.

Address / *Dirección:*

Av. Alcodar, 45-47, 46700. Gandía (VLC), Spain.

Declares that the product:

Declara que el producto:

BASORTUB COFLEX

Installed in accordance to the installation standards, manufacturer's instructions and professional rules, duly maintained and used for the applications as intended.

Instalado de acuerdo con las normas de instalación, instrucciones del fabricante y conforme a las reglas profesionales, debidamente mantenido y utilizado en las aplicaciones para las que está previsto.

Complies with the essential requirements of the Council Directives:

Cumple con los requisitos esenciales de las Directivas del Consejo:

2014/35/UE (Low Voltage Directive) / (Directiva de Baja Tensión)

Incorporated in the Spanish Legislation in: R.D. 187/2016.

Incorporado en la Legislación Española en: R.D. 187/2016.

And it is suitable and safe for the intended use and it is in conformity with the following standard:

Es adecuado y seguro para el uso a que está destinado y es conforme con la siguiente norma:

UNE EN 61386-1

UNE EN 61386-22

Additional information:

Información adicional:

This product is intended to be installed and maintained by skilled persons, it may be used by ordinary persons only as a replacement part, to substitute for an identical device.

Este producto está previsto para ser instalado y mantenido por un profesional, puede ser usado por una persona no formada para reemplazamiento de uno idéntico.

Place and date:

Lugar y fecha:

Gandía May 2016

Gandía Mayo 2016


Technical department / *Departamento Técnico*

BASORTUB COFLEX

UNE-EN IEC 61386
REV.20/04/2016



COFLEX

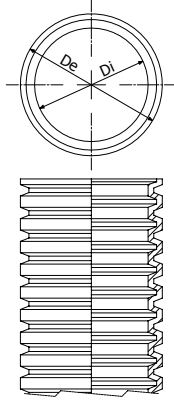

DESCRIPTION	De mm	Di mm	REF.
COFLEX 16 LH7035 16 11	16	10,5	2/6995
COFLEX 20 LH7035 20 15	20	14	2/6996
COFLEX 25 LH7035 25 20	25	17	2/6997
COFLEX 32 LH7035 32 27	32	23	2/6998
COFLEX 40 LH7035 40 34	40	30	2/6999
COFLEX 50 LH7035 50 44	50	40	2/7000

Models:

16, 20, 25, 32, 40, 50

Material: LH7035

Tube Characteristics:

- IEC 61386 Code: 232230000010
- Articulated tube halogen-free thermoplastic corrugated transversely bendable and elastic.
- RAL 7035, light grey
- Compression Strength: 320N
- Impact Strength: 2J to -5°C
- Electrical insulating product with:
 - Dielectric Strength: 2kV
 - Insulation Resistance: 100MΩ
- Minimum temperature: -5 °C
- Maximum temperature: +90 °C
- Non-flame propagating material
- Comply with RoHS, 2011/65/CE

INSTRUCTIONS FOR USE

- Suitable for indoor installations made by channel in the wall, in false ceiling / floor and hollow construction.
- Halogen Free thermoplastic, not toxic in case of fire and Low Smoke emission.